


Notes: (Unless Otherwise Specified)

1. Waterproof Rate: IP67.
2. Recommend Panel Thickness: 0.8 to 6.0 mm.
3. Recommend Torque: 14~15 Kgf-cm.
4. Mating Cap P/N: GT1C5331X2.
5. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
A2	ECN-140805	Modify Item 2, Shrink Tube L=10mm to 20mm	Joyce 08/07/14	Lucas 08/07/14	Ray 08/07/14

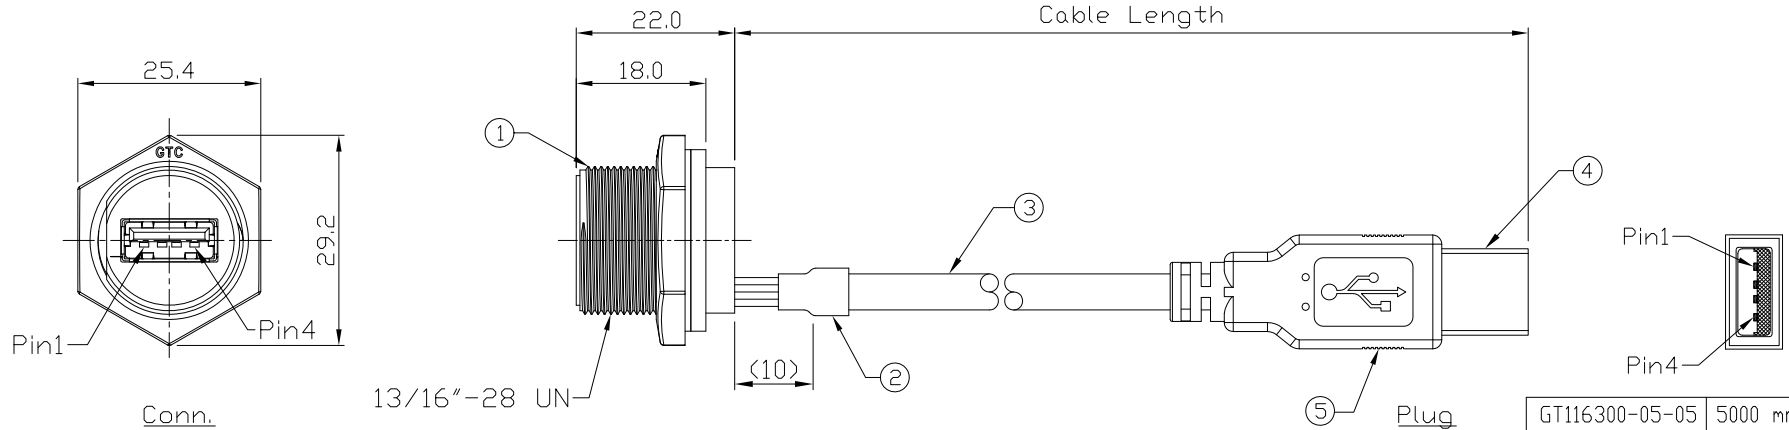


GTC  
DOC.CENTER.ISSUE  
AUG.19.2014  
ONLY FOR  
RELEASE

Item	Part Name	Material / Finish	Q'ty
5	Over Mold	PVC Color: Black	1
4	USB-A Plug	Housing: Thermoplastic, Color: Black Contacts: Copper Alloy, Finish: Au Plated Shell: Cold Roll Steel, Finish: Ni Plated	1
3	Cable	UL2725 1P*28AWG+2C*24AWG+Al/My+D+B OD=5.0mm, Color: Black	1
2	Shrink Tube	L=20mm Color: Black	1
1	GT116300-03-XX	USB-A Plastic C3 Panel Jack Screw With Pig Tail	1



Wiring Diagram



Recommend  
Panel Cut-Out

GT116300-05-05	5000 mm	±150
GT116300-05-04	4000 mm	±150
GT116300-05-03	3000 mm	±150
GT116300-05-02	2000 mm	±100
GT116300-05-01	1000 mm	±50
GT116300-05-Z9	900 mm	±40
GT116300-05-Z8	800 mm	±40
GT116300-05-Z7	700 mm	±40
GT116300-05-Z6	600 mm	±40
GT116300-05-Z5	500 mm	±40
GT116300-05-Z4	400 mm	±20
GT116300-05-Z3	300 mm	±20
GT116300-05-Z2	200 mm	±10
GT116300-05-Z1	100 mm	±10
Part No.	Cable Length	Tol.

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:  
THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:  
(1) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE  
(2) NOT TO REPRODUCE OR COPY IT  
(3) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART  
(4) ALL RIGHTS RESERVED

TITLE						DRAWING NUMBER			REV.	
USB-A Plastic C3 Panel Jack Screw With Cable + USB-A Plug						GT116300-05-XX			A2	
	B	1:1	Joyce 06/28/11	Lucas 06/28/11	Ray 06/28/11	XX ± 0.5 X.XX ± 0.2	XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	