

1

2


3

4


Notes: (Unless Otherwise Specified)

- 1. Waterproof Rate: IP67.
- 2. Recommend Cable Diameter: 5.0 to 6.0 mm
- 3. Recommend Cover Torque: 6.0 to 7.0 Kg-cm.
- 4. Recommend Gland Nut Torque: 9.0 to 10.0 Kg-cm.
- 5. RoHS Compliant.


REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-160108	Modify Drawing Number GT152284-26060 -> GT1D2252-29240/02	Joyce 01/18/16	Lucas 01/18/16	Ray 01/18/16

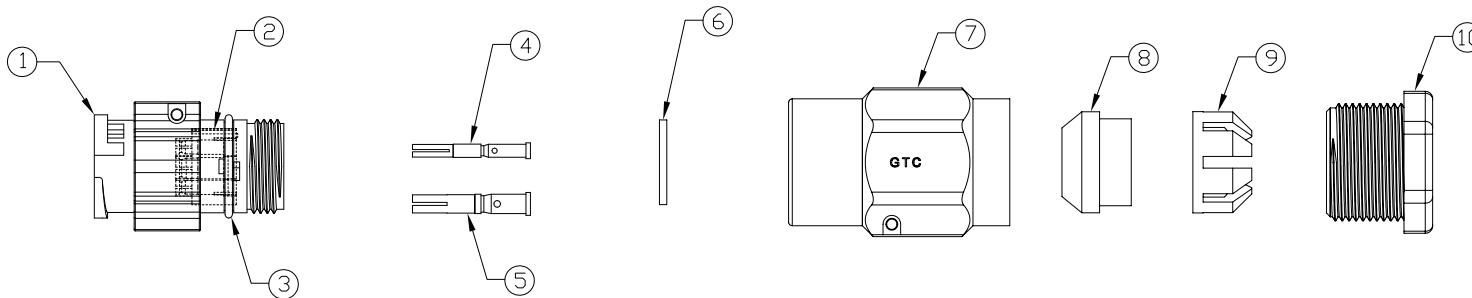

10	Gland Nut	Thermoplastic Color: Black	1
9	Cage	Thermoplastic Color: White	1
8	Gland	Silicone Color: Green	1
7	Cover	Thermoplastic Color: Black	1
6	Gasket	Silicone Color: Black	1
5	Contacts (10A)	Copper Alloy Finish: Au Plated	2
4	Contacts (5A)	Copper Alloy Finish: Au Plated	4
3	O-Ring	Silicone Color: Red	1
2	Base	Thermoplastic Color: Black	1
1	Housing	Thermoplastic Color: Black	1
Item	Part Name	Material / Finish	Q'ty



Pin Assignment

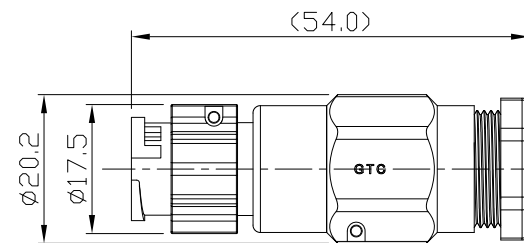

TITLE						DRAWING NUMBER			REV.
C2 5A+10A 4P+2P Field Installable Cable To Cable Female Crimp Lock						GT1D2252-29240			02
	B	1:1	Karen 09/10/09	Ray 09/10/09	Ray 09/10/09	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:

THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT Contact CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:

- (i) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
- (ii) NOT TO REPRODUCE OR COPY IT
- (iii) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
- (iv) ALL RIGHTS RESERVED

1

2

3

4