



ZIPPY TECHNOLOGY CORP.



10F, NO.50, MIN CHYUAN ROAD,
SHIN-TIEN CITY, TAIPEI COUNTY,
TAIWAN, R.O.C

TEL: 886-2-2918-8512 / 886-2-2918-0603
FAX: 886-2-2915-5765 / 886-22916-0215
[Http://www.zippy.com.tw](http://www.zippy.com.tw)

APPROVED DATA SHEET

Model: 1001240078(VW1-10S0-00A2-CB001-Z)
=====

ISSUED DATE: 2019.03.11
APPROVED NO.: 1001240078.C
PAGE: 1/4

The undersigned guarantee of the model switches is meets the following specifications.

1.Operation Characteristics

Operating Force (OF) : Max. 200 gf
Releasing Force (RF) : Min. 30 gf
Operating Position (OP) : 14.7±0.4 mm
Movement Differential (MD) : Max. 0.4 mm
Over-travel (OT) : Min. 1.0 mm
Pre-travel (PT) : Max. 1.2 mm

2. Specifications

Initial Contact Resistance : Max. 300 mΩ . (Initial) (For molded lead wire models)
(Measured by ohm meter –Open Voltage<1VDC, Driver current -100mA)
Before measure the switch contact resistance, please press the switch three times on and off.

Initial Dielectric Strength : 500VAC(50-60HZ)/minute between contacts.
1,500VAC(50-60HZ)/minute between Live-parts and dead metal parts.

Insulation Resistance : Min. 100 MΩ (500 VDC/ minute).

Circuit Arrangement : SPST (Single pole single throw)

Rating : 10A 125/250VAC ; 5A 30VDC

Service Life : Min. 10,000 operations.

Operating Frequency : 10~30 operations per minute.

Safety Certificate : UL, cUL, ENEC

Mechanical Service Life : Min. 1,000,000 operations.

Operating Frequency : Max. 120 operations per minute.

Operating application of the switch : Set the switch pushing distance from 60% to 90% of the specified OT value.

International Protection Code : IP67



ZIPPY TECHNOLOGY CORP.



10F, NO.50, MIN CHYUAN ROAD,
SHIN-TIEN CITY, TAIPEI COUNTY,
TAIWAN, R.O.C

TEL: 886-2-2918-8512 / 886-2-2918-0603
FAX: 886-2-2915-5765 / 886-22916-0215
[Http://www.zippy.com.tw](http://www.zippy.com.tw)

APPROVED DATA SHEET

Model: 1001240078(VW1-10S0-00A2-CB001-Z)
=====

ISSUED DATE: 2019.03.11
APPROVED NO.: 1001240078.C
PAGE: 2/4

3. Environments

- Operating Temperature : -40°C ~ 85°C (with no icing)
- Vibration Resistance : 10~55Hz, displacement 0.75mm(p-p) 2hr
- Shock Resistance : Destruction: 1,000 m/s² {approx. 100G} max.
Malfunction: 300 m/s² {approx. 30G} max.

(For the pin plunger models, the vibration & shock condition apply for use at the free position and total travel position)

(For the lever models, the vibration & shock condition apply for use at the total travel position)

- Soldering by hand : 350 °C maximum within 3 seconds.

Note: Wires should not be dragged.

ZIPPY TECHNOLOGY CORP.

許志誠

PREPARED


張奕鉸

CHECKED

沈俊榮

APPROVED

Dimensions drawing

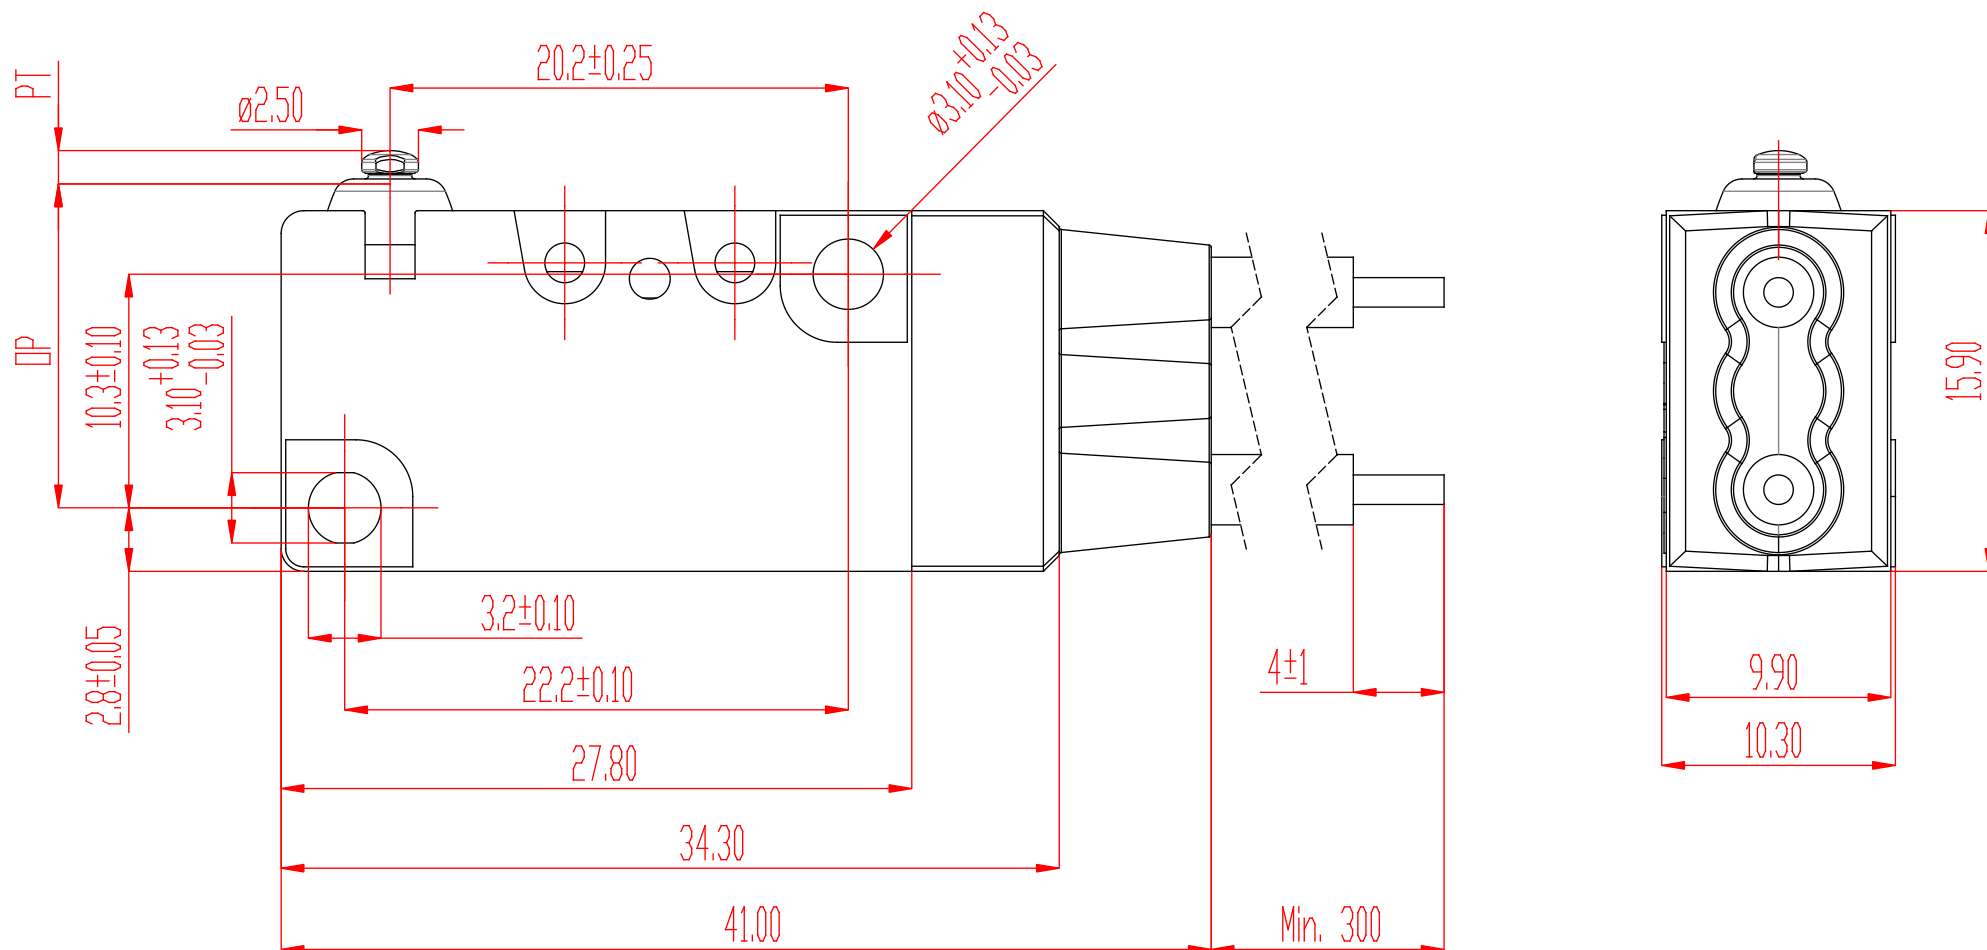

COM : BLACK / UL1015 16AWG OR EQUIVALENT

NC : RED / UL1015 16AWG OR EQUIVALENT


| Tolerance | |
|-----------|-------|
| X.X | ± 0.2 |
| XX.X | ± 0.4 |

| | | | | | |
|----------|-------------|---------|-----|-----------|----------------|
| VIEW | | SIZE | A4 | UNIT | mm |
| DATE | NOV-09-2015 | VER. | 1.1 | FILE NAME | VW1-00A2-CB001 |
| APPROVAL | 沈俊榮 | CONFIRM | 張奕鉸 | DESIGN | 許志誠 |


新巨企業股份有限公司

ZIPPY TECHNOLOGY CORP.

Marking drawing

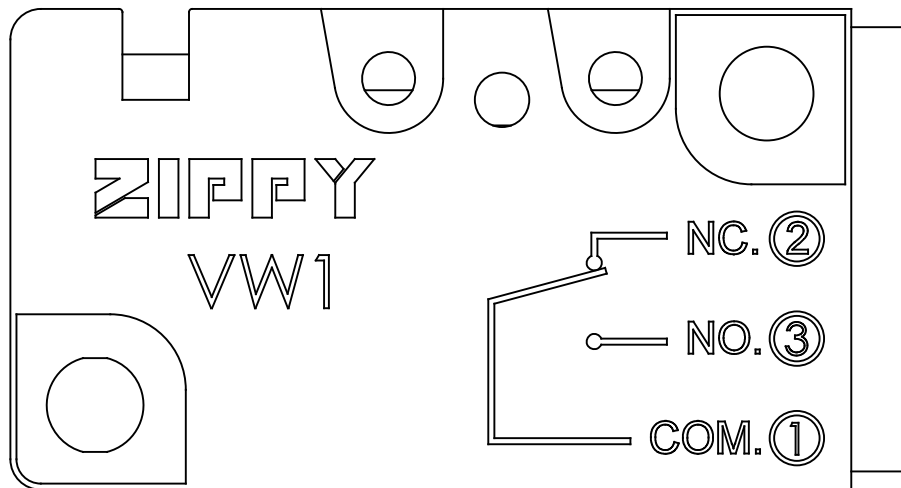

obverse side

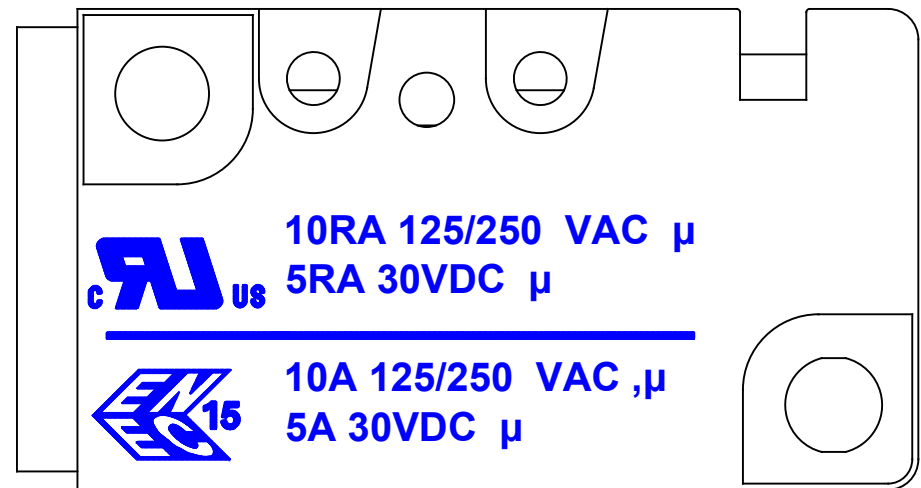

reverse side

Markings are either by printing or molding

新巨企業股份有限公司

ZIPPY TECHNOLOGY CORP.

| | | | | | |
|----------|------------|---------|-----|-----------|----------|
| VIEW | | SIZE | A4 | UNIT | mm |
| DATE | 2019.02.18 | VER. | 1.0 | FILE NAME | VW1-10-u |
| APPROVAL | 沈俊榮 | CONFIRM | 張奕鉸 | DESIGN | 許志誠 |