嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

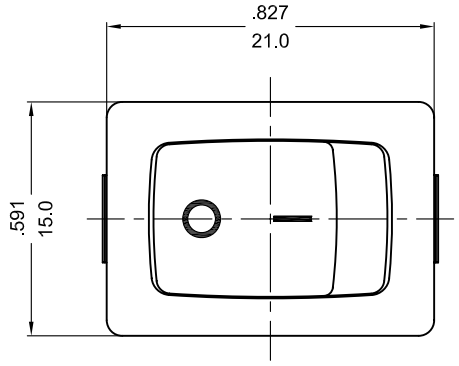

SWITCHING CIRCUIT

(ON)-OFF

ROCKER SWITCH MODEL MR2 SERIES

RATING:10(4)A 125/250V~T55 (cURus)
10(4)A 125/250V~T125/55 (ENEC15)
10(4)A 250V~T125/55 (CQC)
DIELECTRIC VOLTAGE-WITHSTAND:1,500VAC FOR 1 MINUTE
INSULATION RESISTANCE:DC 500V 100MΩ (MIN.)
CONTACT RESISTANCE:20mΩ INITIAL (MAX.)

△2

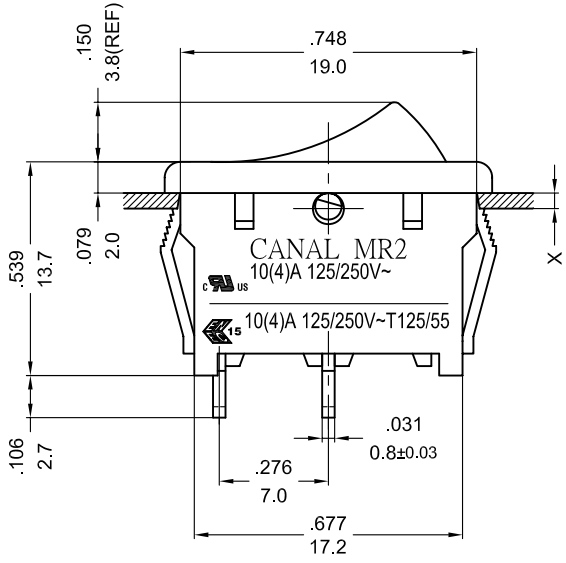

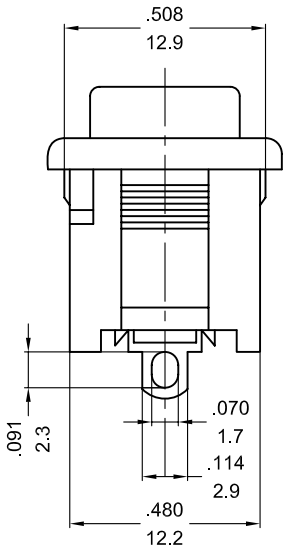





X(PANEL THICKNESS)	Y(CUTOUT DIMENSION)	Z(CUTOUT DIMENSION)
0.75~1.25mm	$19.2^{+0.1}_{-0}$ mm	$12.9^{+0.15}_{-0}$ mm
1.25~2mm	$19.4^{+0.1}_{-0}$ mm	$12.9^{+0.15}_{-0}$ mm
2~3mm	$19.8^{+0.1}_{-0}$ mm	$12.9^{+0.15}_{-0}$ mm

PANEL CUTOUT DIMENSION TABLE

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED:±.012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES				ANGLE ½°		UNIT	mm	PART NAME	MR2 SPEC DRAWING	DWG NO
△4			DRAWN BY	楊偉韶	DESIGNED BY	蔡 劍	SCALE		2/1				
△3													S7630B
△2 2018.12.07	依安規要求修正耐電壓	楊偉韶	CHECKED BY		APPROVED BY		DATE		2018.09.14		PART NO	MR2-141C5W-NBBA-30NC	
△1 2018.10.24	首次出圖.	楊偉韶											