嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

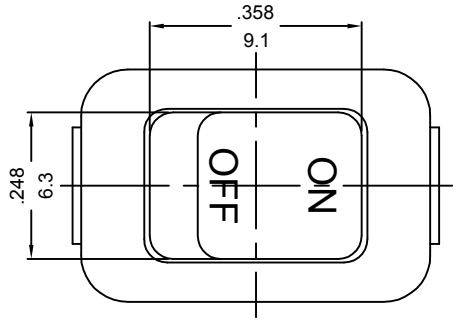

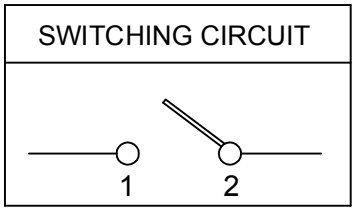

ON-OFF

ROCKER SWITCH MODEL MR-5 SERIES

RATING:3A 250VAC μ (cURus)
6A 125VAC μ (cURus)
3A 250V~ μT100/55 (ENEC15/CQC)
DIELECTRIC VOLTAGE-WITHSTAND:1,500VAC FOR 1 MINUTE
INSULATION RESISTANCE:DC 500V 100MΩ (MIN.)
CONTACT RESISTANCE:20mΩ INITIAL (MAX.)

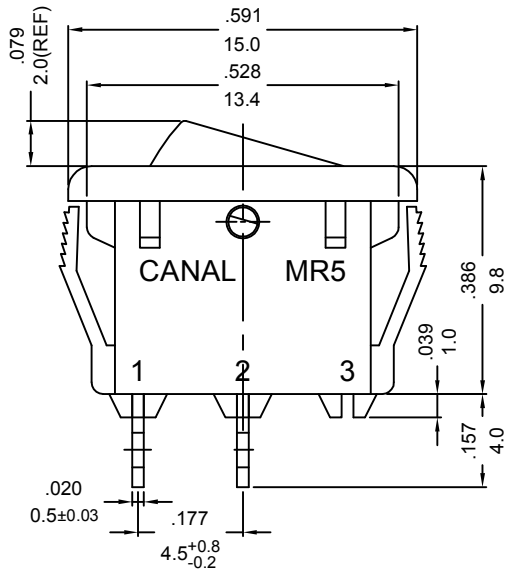

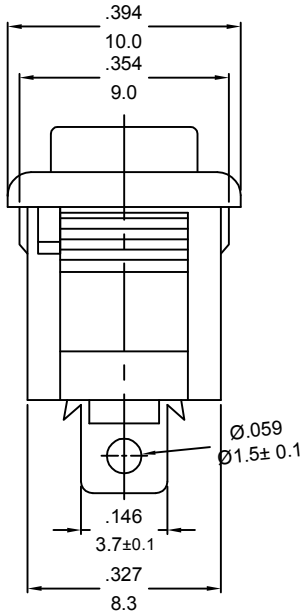

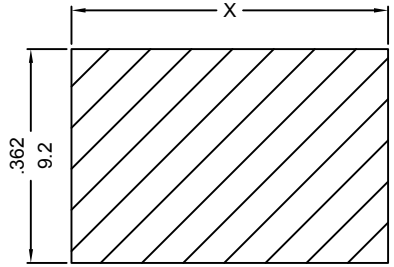

MOUNTING HOLE

	X Cutout Dimension	Panel Thickness
A	.535/13.6 $^{+0}_{-0.1}$	0.75~1.25
B	.539/13.7 $^{+0}_{-0.1}$	1.25~2.0
C	.543/13.8 $^{+0}_{-0.1}$	2.0~2.5

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ± .012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES		ANGLE ½°		UNIT	mm	PART NAME	MR5 SPEC DRAWING	DWG NO
4			DRAWN BY	奚康平	DESIGNED BY	张斌	SCALE	3/1			S8263A
3											
2			CHECKED BY		APPROVED BY		DATE	2020.11.4	PART NO	MR5-111F3W-NBBA-0N2C	
1 2020.11.4	首次出图	奚康平									