嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

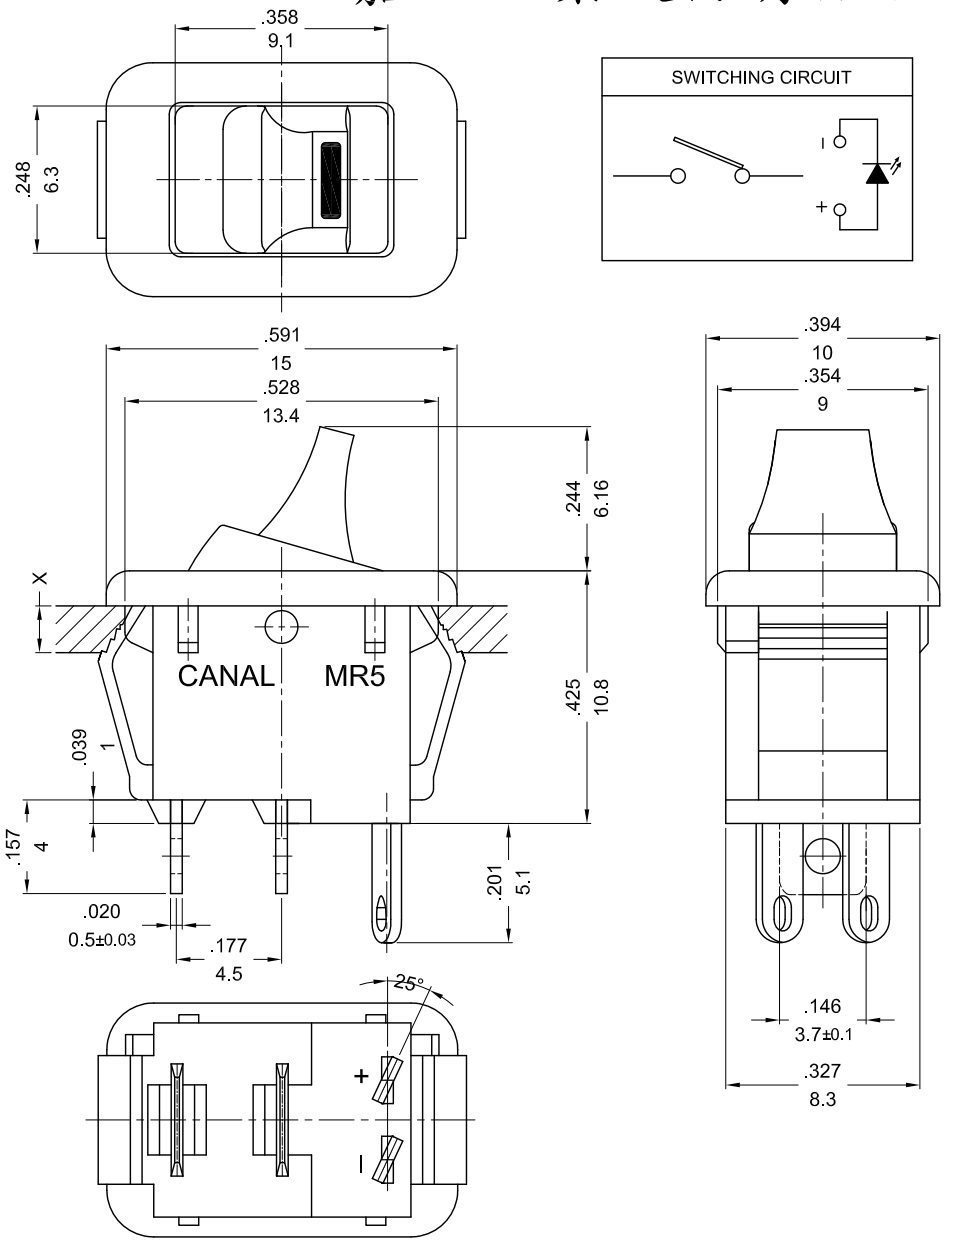

SWITCHING CIRCUIT

LED voltage selection		
Light Color	Operating voltage	Operating current
Red	1.9~2.2V	20mA(MAX)
Orange		
Yellow		
White	2.8~3.2V	
Blue		
Green		

ROCKER SWITCH MODEL MR-5 SERIES

RATING: 3RA 250VAC (cURus,ENEC15)

6RA 125VAC (cURus,ENEC15)

DIELECTRIC VOLTAGE-WITHSTAND:1,000VAC FOR 1 MINUTE

INSULATION RESISTANCE:DC 500V 100M Ω (MIN.)

CONTACT RESISTANCE:20m Ω INITIAL (MAX.)

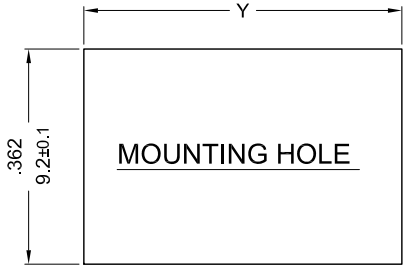

	X Panel Thickness	Y Cutout Dimension
A	0.75~1.0	.535/13.6 $^{+0.1}_{-0}$
B	1.0~1.25	.535/13.8 $^{+0.1}_{-0}$
C	1.25~1.5	.535/14.0 $^{+0.1}_{-0}$

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES			ANGLE $\frac{1}{2}$°	UNIT	mm	PART NAME	MR5 SPEC DRAWING	DWG NO
4			DRAWN BY	趙超	DESIGNED BY	蔡劍	SCALE	3/1			S4922A
3											
2			CHECKED BY	2012.10.25 10:24:40 +08'00'	APPROVED BY	2012.10.25 10:24:57 +08'00'	DATE	2012.10.11	PART NO	MR5-111HGN1-*EA-0*2C	
1	2012.10.11 首次出圖	趙超									