嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

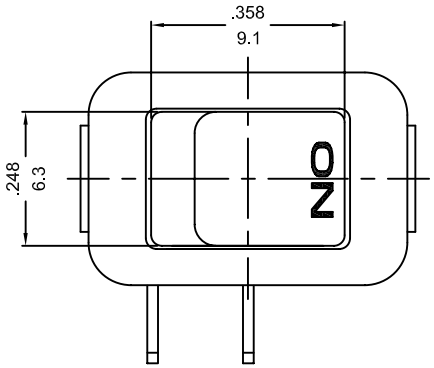

SWITCHING CIRCUIT



LED voltage selection		
Light Color	Operating voltage	Operating current
Red	1.9~2.2V DC	20mA(MAX)
Orange		
Yellow		
White	2.8~3.2V DC	
Blue		
Green		

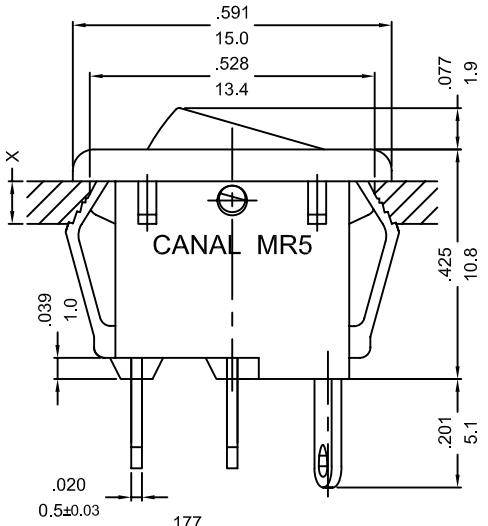

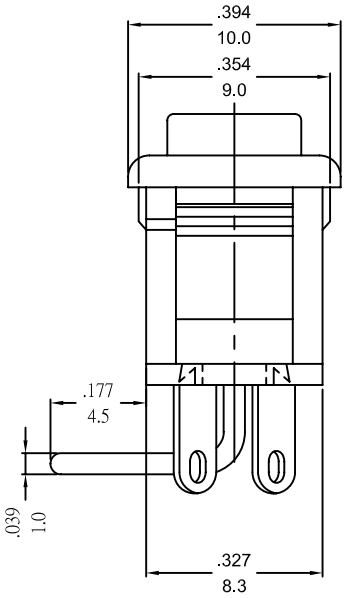

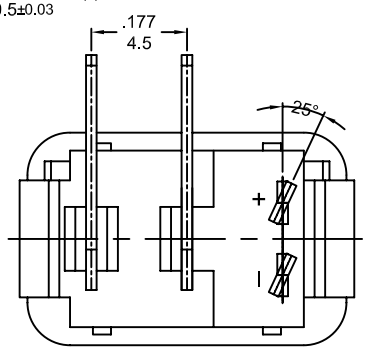

ROCKER SWITCH MODEL MR-5 SERIES

RATING: 3RA 250VAC (cURus,ENEC15)

6RA 125VAC (cURus,ENEC15)

DIELECTRIC VOLTAGE-WITHSTAND:1,000VAC FOR 1 MINUTE

INSULATION RESISTANCE:DC 500V 100M Ω (MIN.)

CONTACT RESISTANCE:20m Ω INITIAL (MAX.)



MARKING TYPE:E



MARKING TYPE:F

	X Panel Thickness	Y Cutout Dimension
A	0.75~1.0	.535/13.6 $^{+0.1}_{-0}$
B	1.0~1.25	.535/13.8 $^{+0.1}_{-0}$
C	1.25~1.5	.535/14.0 $^{+0.1}_{-0}$

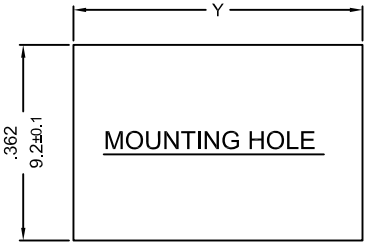

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES				ANGLE ½°		UNIT	mm	PART NAME	MR5 SPEC DRAWING	DWG NO
4			DRAWN BY	趙超	DESIGNED BY	蔡劍	SCALE	3/1					S5605B
3													
2	2016.08.11	依總表修正品名	楊偉韶	CHECKED BY		APPROVED BY		DATE	2014.04.20		PART NO	MR5-112F*N-1*EA-J*2C 2	
1	2014.04.20	首次出圖	趙超										