嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

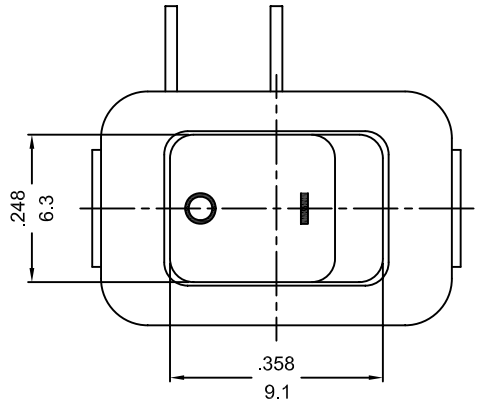

SWITCHING CIRCUIT

(ON)-OFF
( )=MOMENTARY

ROCKER SWITCH MODEL MR5 SERIES

RATING:3A 250VAC/6A 125VAC~ μT55(cURus,ENEC15)
DIELECTRIC VOLTAGE-WITHSTAND:1,000VAC FOR 1 MINUTE
INSULATION RESISTANCE:500VDC 100MΩ (MIN.)
CONTACT RESISTANCE:20mΩ INITIAL (MAX.)



PCB MOUNTING HOLE ARRANGEMENT

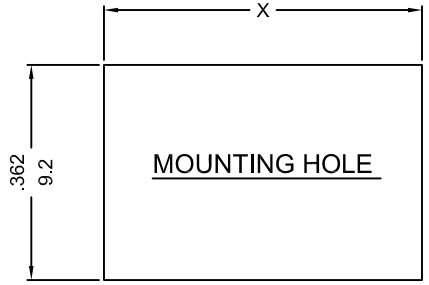

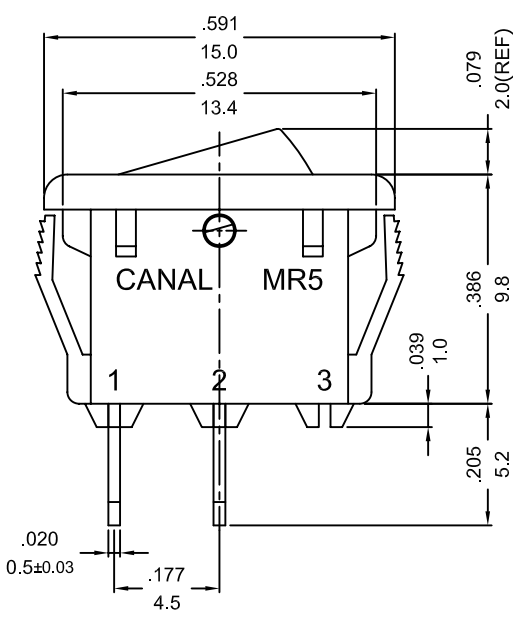

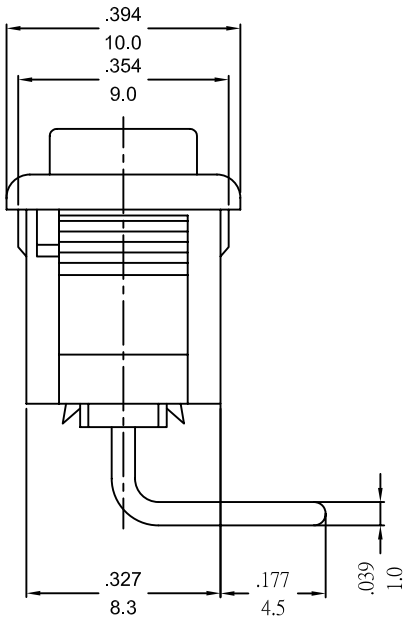

	X Cutout Dimension	Panel Thickness
A	.535/13.6 +0 -0.1	0.75~1.25
B	.539/13.7 +0 -0.1	1.25~2.0
C	.543/13.8 +0 -0.1	2.0~2.5

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/ 0.3(in/mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES				ANGLE ½°	UNIT	mm	PART NAME	MR5 SPEC DRAWING	DWG NO
4			DRAWN BY	楊偉韶	DESIGNED BY	蔡劍	SCALE	3/1				S6773B
3												
2 2016.10.17	依實物修正圖面	楊偉韶	CHECKED BY		APPROVED BY		DATE	2016.10.14		PART NO	MR5-142F4W-NBBA-GN2C	
1 2016.10.14	首次出圖	楊偉韶										