



Notes: (Unless Otherwise Specified)
 1. Waterproof Rate: IP68.
 2. RoHS Compliant.

REV	ECN#	DESCRIPTION OF REVISION	DRAW BY DATE	CHECK BY DATE	APPROVE BY DATE
02	ECN-221105	Modify 54±1.0mm → 55.4±1.0mm	Jenny 11/15/22	Lucas 11/15/22	Ray 11/15/22

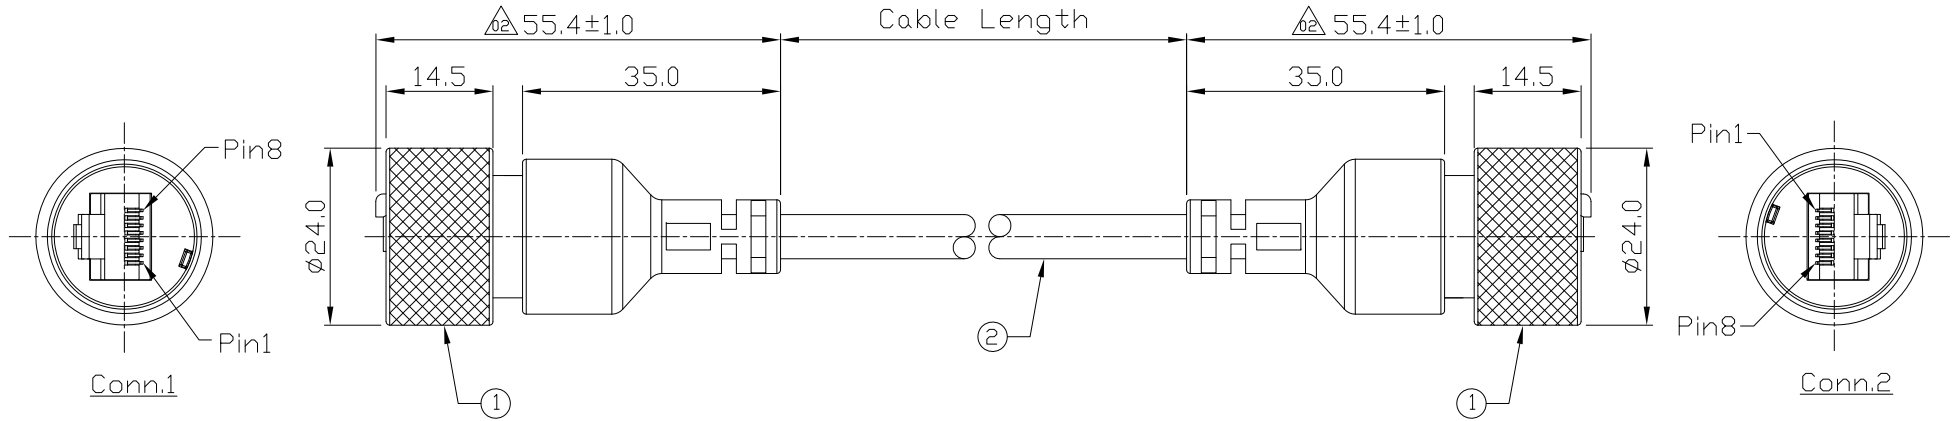

GTC
 DOC.CENTER.ISSUE
 NOV.16.2022
 ONLY FOR
 RELEASE

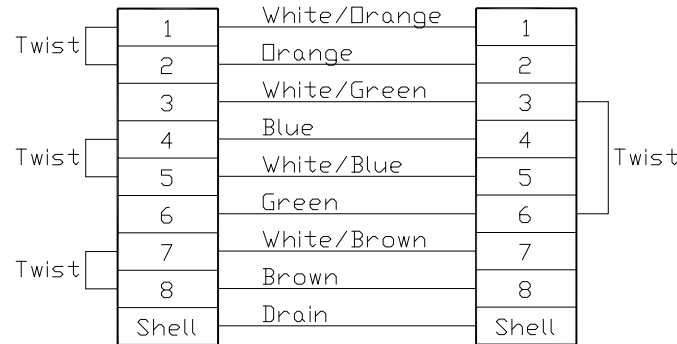

GT225320-0K-20	20000 mm	+1000
GT225320-0K-15	15000 mm	+750
GT225320-0K-10	10000 mm	+500
GT225320-0K-09	9000 mm	+450
GT225320-0K-08	8000 mm	+400
GT225320-0K-07	7000 mm	+150
GT225320-0K-06	6000 mm	+150
GT225320-0K-05	5000 mm	+150
GT225320-0K-04	4000 mm	+150
GT225320-0K-03	3000 mm	+100
GT225320-0K-02	2000 mm	+100
GT225320-0K-01	1000 mm	+50
GT225320-0K-Z9	900 mm	+50
GT225320-0K-Z8	800 mm	+50
GT225320-0K-Z7	700 mm	+50
GT225320-0K-Z6	600 mm	+50
GT225320-0K-Z5	500 mm	+50
GT225320-0K-Z4	400 mm	+50
GT225320-0K-Z3	300 mm	+25
GT225320-0K-Z2	200 mm	+25
Part No.	Cable Length	Tol.

2	Cable	CAT6E 26AWG*4P+Al/My+D Color: Black, ODD=6.0mm	1
1	RJ45 Metal C3 Shielded Cable End Plug Screw	GT Contact P/N: GT225320-0X-XX	2
Item	Part Name	Material / Finish	QTY

TITLE						DRAWING NUMBER			REV.	
RJ45 Metal C3 Shielded Cable End Plug Screw Twin-Head With CAT6 Cable						GT225320-0K-XX			02	
	B	1:1	Jenny 02/25/22	Lucas 02/25/22	Ray 02/25/22	X.X ± 0.5 X.XX ± 0.2	X.XXX ± 0.05 ANGLES ± 1°	mm	1/1	
THIRD ANGLE PROJECTION	SIZE	SCALE	DRAW / DATE	CHECK / DATE	APPROVE / DATE	TOLERANCES		UNIT	SHEET	

GT Contact CO.,LTD

NOTICE OF PROPRIETARY PROPERTY:
 THE INFORMATION CONTAINED HEREIN IS THE PROPRIETARY PROPERTY OF GT CONTACT CO.,LTD THE POSSESSOR AGREES TO THE FOLLOWING:
 (A) TO MAINTAIN THIS DOCUMENT IN CONFIDENCE
 (B) NOT TO REPRODUCE OR COPY IT
 (C) NOT TO REVEAL OR PUBLISH IT IN WHOLE OR PART
 (D) ALL RIGHTS RESERVED