佳尼有限公司 CANAL COMPONENTS INC.



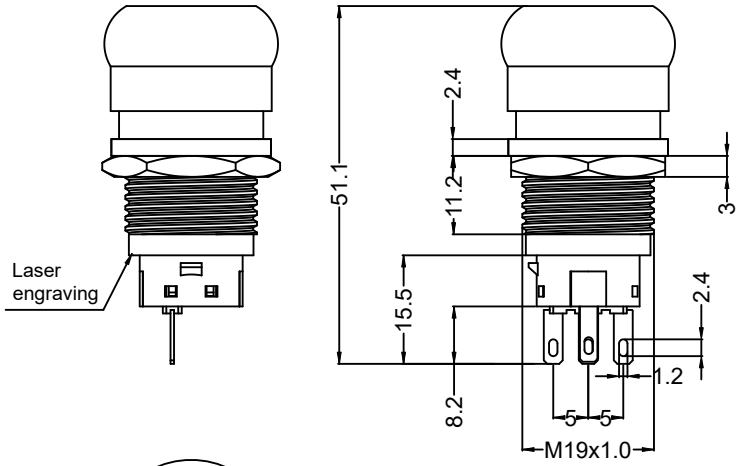



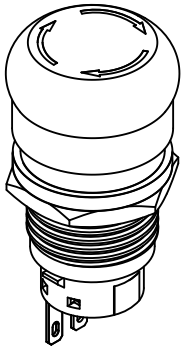

SPECIFICATION MODEL : PK SERIES

Rating: 6A 125/250V~μ5E4 (cURus/ENEC15)
6A 3~48VDC μ 3E4 (cURus/ENEC15)
Contact Resistance: 50mΩ (max.) initial
Insulation Resistance: 100M Ω (min)
Dielectric Strength: 500VAC for 1 minute
Mechanical Life: 1,000,000 cycles
Operation Force: 350g ± 150g
Total Travel: 3.2mm (max)
Shell Material: Stainless Steel

Circuit Diagram (Lock)



Accessories package

Silicon o-ring	Hex nuts
	

Accessories are not locked when shipped



Panel Cutout Ø19 mm
(Panel thickness : 6.5 mm MAX)

Description of LED color and voltage :

PK-19Z13TSNNNSS-CNNN

LED COLOR

N	NO COLOR
R	RED
G	GREEN
U	BULE
W	WHITE
Y	YELLOW

LED VOLTAGE

N	NO ILLUMINATED	2	DC 6V
L	AC 110V	3	DC 12V
G	AC 220V	4	DC 24V
1	DC 2V (Red,Yellow) DC 3V (Green,Bule,White)	5	DC 30V
		6	DC 48V

佳尼企業股份有限公司
工程部
2023.12.11
文件管制章

Laser engraving

CANAL PK Series 6A 125/250V~μ5E4 c US EN 15

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : ± 0.5 (mm).

REVISION	DESCRIPTION	REVISED BY	TOLERANCES				ANGLE ½°	UNIT	mm	PART NAME	SPEC DRAWING	DWG NO
4			DRAWN BY	范修銓	DESIGNED BY	范修銓	SCALE	1/1				WS9113A
3												
2 2023.12.11	料號變更，原料號 PK-19Z13TSNNNS-CNNN	范修銓	CHECKED BY	ERIC	APPROVED BY		DATE	2023.11.16		PART NO	PK-19Z13TSNNNSS-CNNN	
1 2023.11.16	首次出圖	范修銓										