嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

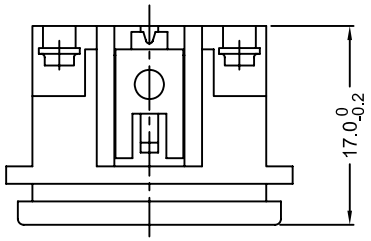

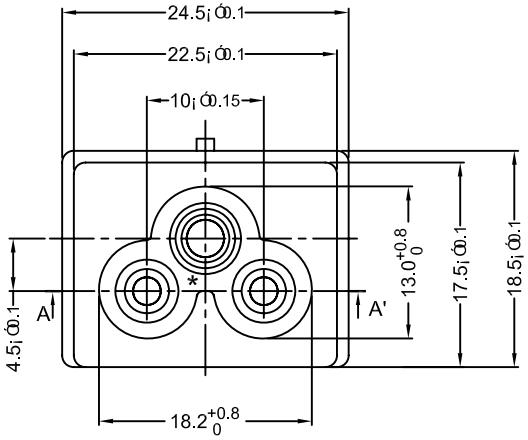



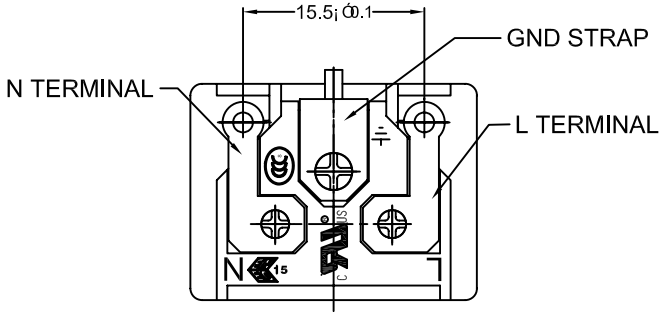

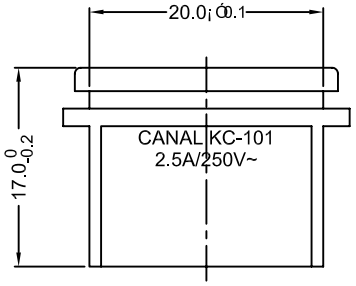

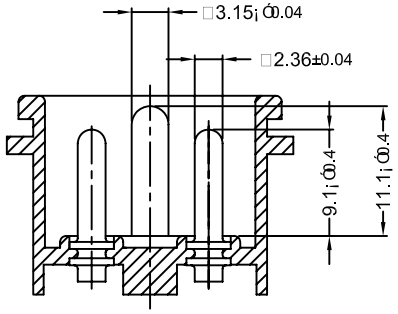

SECTION A-A'

SPECIFICATION MODEL: KC-101
RATING: 2.5A 250VAC(UL/CUL/CCC/ENEC15)
INSULATION RESISTANCE: 100Mohm, DC 500V
DIELECTRIC STRENGTH: 3000VAC FOR 1 MINUTE
MEET UL 498 & IEC/EN60320 REQUIREMENTS
NOTES:
1.BODY MATERIAL:PBT+15%GF,UL 94V-0.
2.PIN TO PIN MUST WITHSTAHD 3KVAC IN 1 MINUTE MIN.
3.THE RIVET FORCE MUST WITHSTAND 20kg/1min.
4.THE RIVETED PIN'S RESISTANT MUST BE LOWER THAN 30mΩ.

△2

REVISION	DESCRIPTION	REVISED BY	TOLERANCES				ANGLE ½°	UNIT	mm	PART NAME	KC SPEC DRAWING	DWG NO
△4 2018.09.14	ENEC10变更为ENEC15，重新出图；	劉永豐	DRAWN BY	盧 濤	DESIGNED BY	戴德建	SCALE	3/2				S2457D
△3 2011.01.14	整理圖面，重新出圖	向 宏										
△2 2010.06.05	依新產品規范修改接觸電阻標準	盧 濤	CHECKED BY		APPROVED BY		DATE	2008.08.05		PART NO	KC-101-2	
△1 2008.08.05	新增規格，首次出圖	盧 濤										