嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

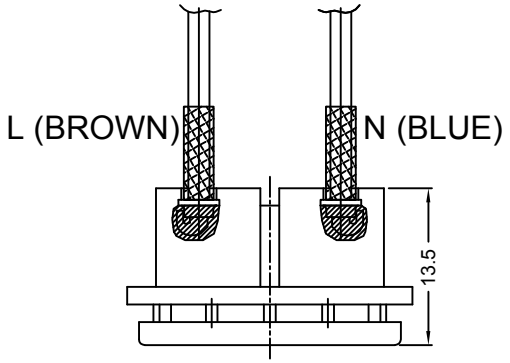

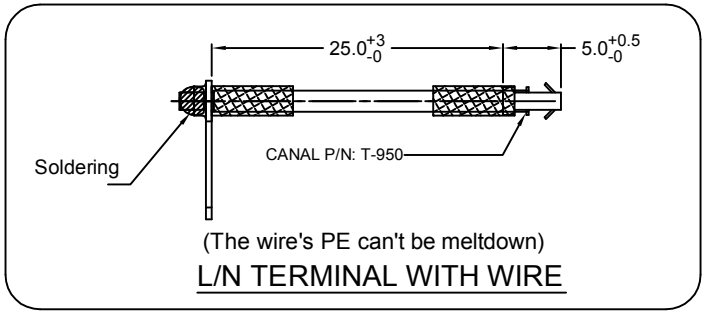

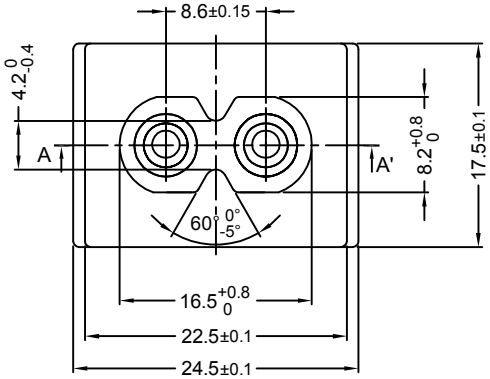

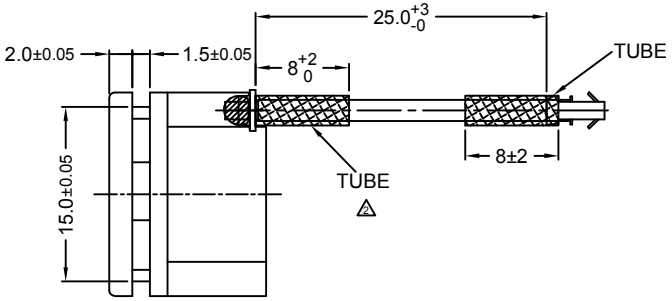

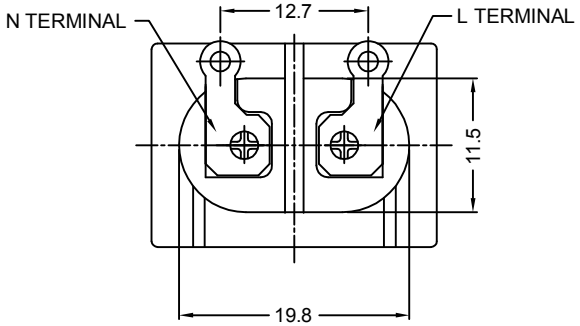



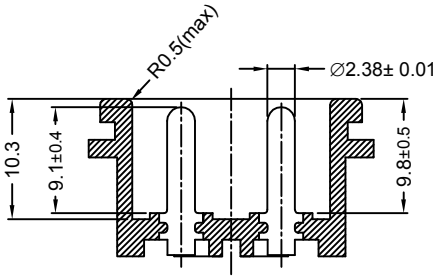

SECTION A-A'

嘉尼工程 2023.08.14 文件管制章

SPECIFICATION MODEL:KR-201-B-6*
RATING:2.5A 250VAC(UL/CUL/ENEC15/CCC) ⚠3
INSULATION RESISTANCE:100Mohm.DC500V
DIELECTRIC STRENGTH:3000VAC FOR 1 MINUTE
(THE ACTUAL TEST FOR PRODUCTION LINE : 4000VAC / 3 SECONDS)
MEET UL498& IEC/EN60320 REQUIREMENTS

NOTES:
1.BODY MATERIAL:PBT+15%GF,UL 94V-0.
2.PIN TO PIN MUST WITHSTAHD 3KVAC IN 1 MINUTE MIN.
3.THE RIVET FORCE MUST WITHSTAND 20kg/1min.
4.THE RIVETED PIN'S RESISTANT MUST BE LOWER THAN 30m Ω.
5.WIRE TYPE: UL 3266 22AWG
6.TOLERANCES UNLESS OTHERWISE SPECIFIED:±0.2mm
7.THE SOLDERED TERMINAL: IT APPLIES WITH UL APPROVAL OR NOT APPROVAL (ACTUAL USE IS NOT APPROVED BY UL)
8.PCB THICKNESS:1.2mm

REVISION	DESCRIPTION	REVISED BY	TOLERANCES				ANGLE ½°	UNIT	mm	PART NAME	KR SPEC DRAWING	DWG NO
⚠4			DRAWN BY	楊偉韶	DESIGNED BY	蔡劍	SCALE	3/2				S8174C
⚠3 2023.08.11	取消VDE/ENEC10改為ENEC15	楊偉韶										
⚠2 2020.10.19	依客戶要求增加TUBE	楊偉韶	CHECKED BY		APPROVED BY		DATE	2020.08.20		PART NO	KR-201-B-6Y	
⚠1 2020.08.20	首次出圖	楊偉韶										