

ROCKER SWITCH MODEL MR SERSIE



RATING: 16(4)A 125/250V~ (cURus, ENEC15)

10(4)A 250V~T125/55 (CQC)

DIELECTRIC WITHSTAND VOLTAGE: 1500VAC FOR 1 MINUTE

INSULATION RESISTANCE: 500VDC 100MΩ (MIN.)

CONTACT RESISTANCE: 20mΩ INITIAL(MAX.)

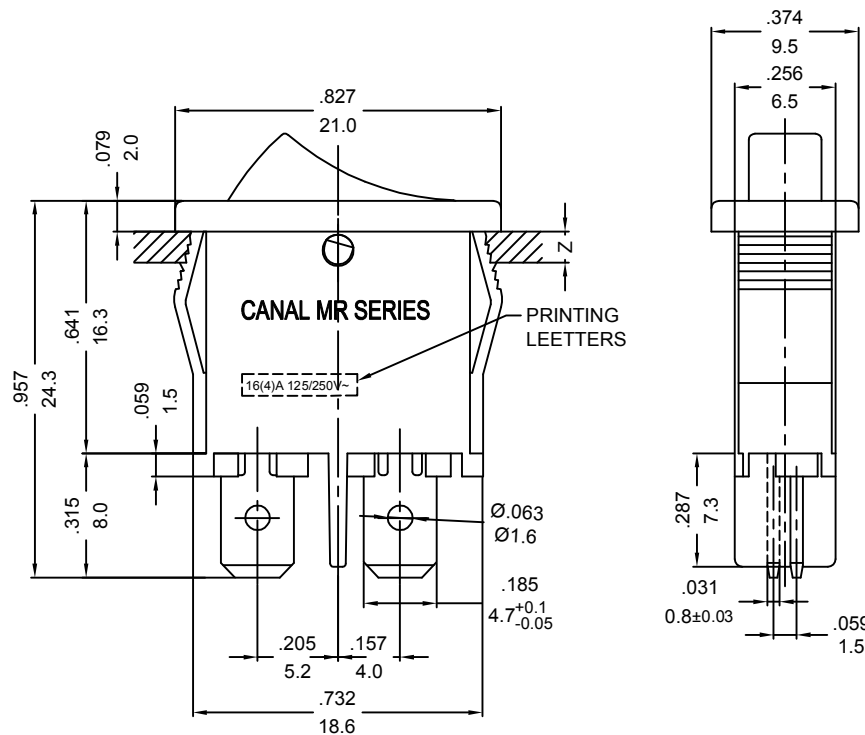

PANEL CUTOUT DIMENSION TABLE

| X(CUTOUT DIMENSION) | Y(CUTOUT DIMENSION) | Z(PANEL THICKNESS) |
|--|---------------------|--------------------|
| 19.2 ^{+0.15} ₋₀ mm | 6.65~6.75mm | 0.75~1.25mm |
| 19.4 ^{+0.15} ₋₀ mm | 6.65~6.75mm | 1.25~2mm |
| 19.8 ^{+0.15} ₋₀ mm | 6.65~6.75mm | 2~3mm |

MODEL NO, SEE NUMBER SYSTEM

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ± .012/0.3 (in/mm)

| REVISION | DESCRIPTION | REVISED BY | TOLERANCES | | ANGLE 1/2° | UNIT | mm | PART NAME | MR SPEC DRAWING | DWG NO | |
|----------|-------------|------------|------------|--------------------|-------------|--------------------|-------|------------|-----------------|---------------------|--|
| | | | DRAWN BY | DESIGNED BY | SCALE | | | | | S9259A | |
| △ | | | DRAWN BY | 楊偉韶 | DESIGNED BY | 蔡劍 | SCALE | 2/1 | PART NO | MR-H10C4W-NBBC-17NC | |
| △ | | | CHECKED BY | <i>[Signature]</i> | APPROVED BY | <i>[Signature]</i> | DATE | 2023.04.17 | | | |
| △ | 首次出圖 | 楊偉韶 | | | | | | | | | |
| △ | 2023.04.17 | | | | | | | | | | |