嘉尼企業股份有限公司 CANAL ELECTRONIC CO.,LTD.

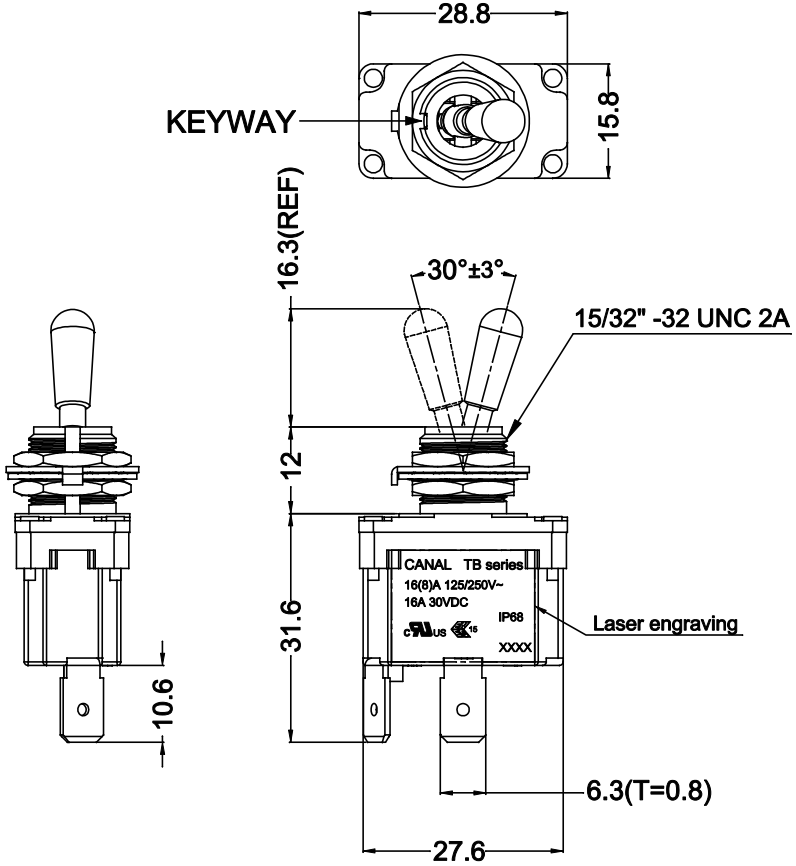

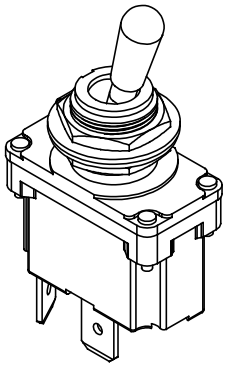

SPECIFICATION MODEL : TB SERIES

Rating: 16(8)A 125/250V~ T55
Electrical Life Life: 10,000 cycles (cURus/ENEC15)
Mechanical Life: 50,000 cycles
Contact resistance: 20mΩ Inital (MAX),
Insulation resistance: 500VDC - 100MΩ (MIN).
Dielectric Strength:
(1) 1500VAC For 1 minute (Terminal to Enclouse)
(2) 500VAC For 1 minute (Terminal to Terminal)
Degree of protction: IP68（Above the panel）



CIRCUIT: SPST
OFF - ON

SWITCH FUNCTION	
OFF	ON
OFF	2-3



MOUNTING HOLE



WITH KEYWAY



NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : ± .02 / 0.5 (mm).

REVISION	DESCRIPTION	REVISED BY	TOLERANCES X.X:		ANGLE ½°		UNIT	mm	PART NAME	SPEC DRAWING	DWG NO
4			DRAWN BY	范修銓	DESIGNED BY	范修銓	SCALE	1/1			WS4899A
3											
2			CHECKED BY	ERIC	APPROVED BY		DATE	2022.06.07	PART NO	TB2-AB12-1	
1 2022.06.07	首次出圖	范修銓									