嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

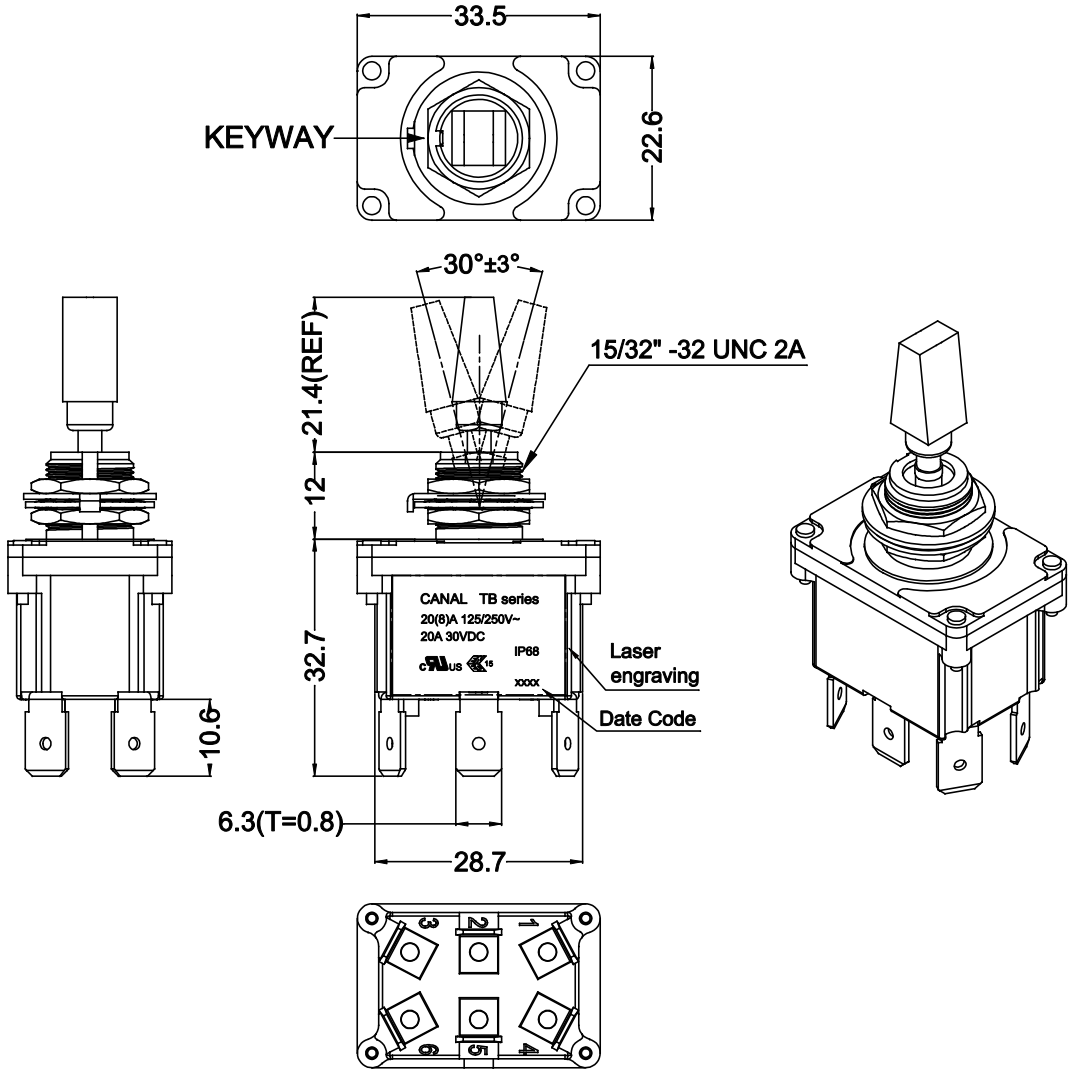

SPECIFICATION MODEL : TB SERIES

Rating: 20(8)A 125/250V~ T55
Electrical Life: 10,000 cycles (cURus/ENEC15)
Mechanical Life: 50,000 cycles
Contact resistance: 20mΩ Inital (MAX),
Insulation resistance: 500VDC - 100MΩ (MIN).
Dielectric Strength:
(1) 1500VAC For 1 minute (Terminal to Enclouse)
(2) 500VAC For 1 minute (Terminal to Terminal)
Degree of protection: IP68 (Above the panel)



CIRCUIT: DPDT
ON - OFF - ON

SWITCH FUNCTION		
ON	OFF	ON
1-2 4-5	OFF	2-3 5-6



MOUNTING HOLE



WITH KEYWAY

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : ± .02 / 0.5 (mm).

REVISION	DESCRIPTION	REVISED BY	TOLERANCES X.X:				ANGLE ½°		UNIT	mm	PART NAME	SPEC DRAWING	DWG NO
4			DRAWN BY	范修銓	DESIGNED BY	范修銓	SCALE	1/1					WS9043A
3													
2 2023.08.03	修正柄尺寸	范修銓	CHECKED BY	ERIC	APPROVED BY		DATE	2023.07.31			PART NO	TB3-BP11-1	
1 2023.07.31	首次出圖	范修銓											