嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

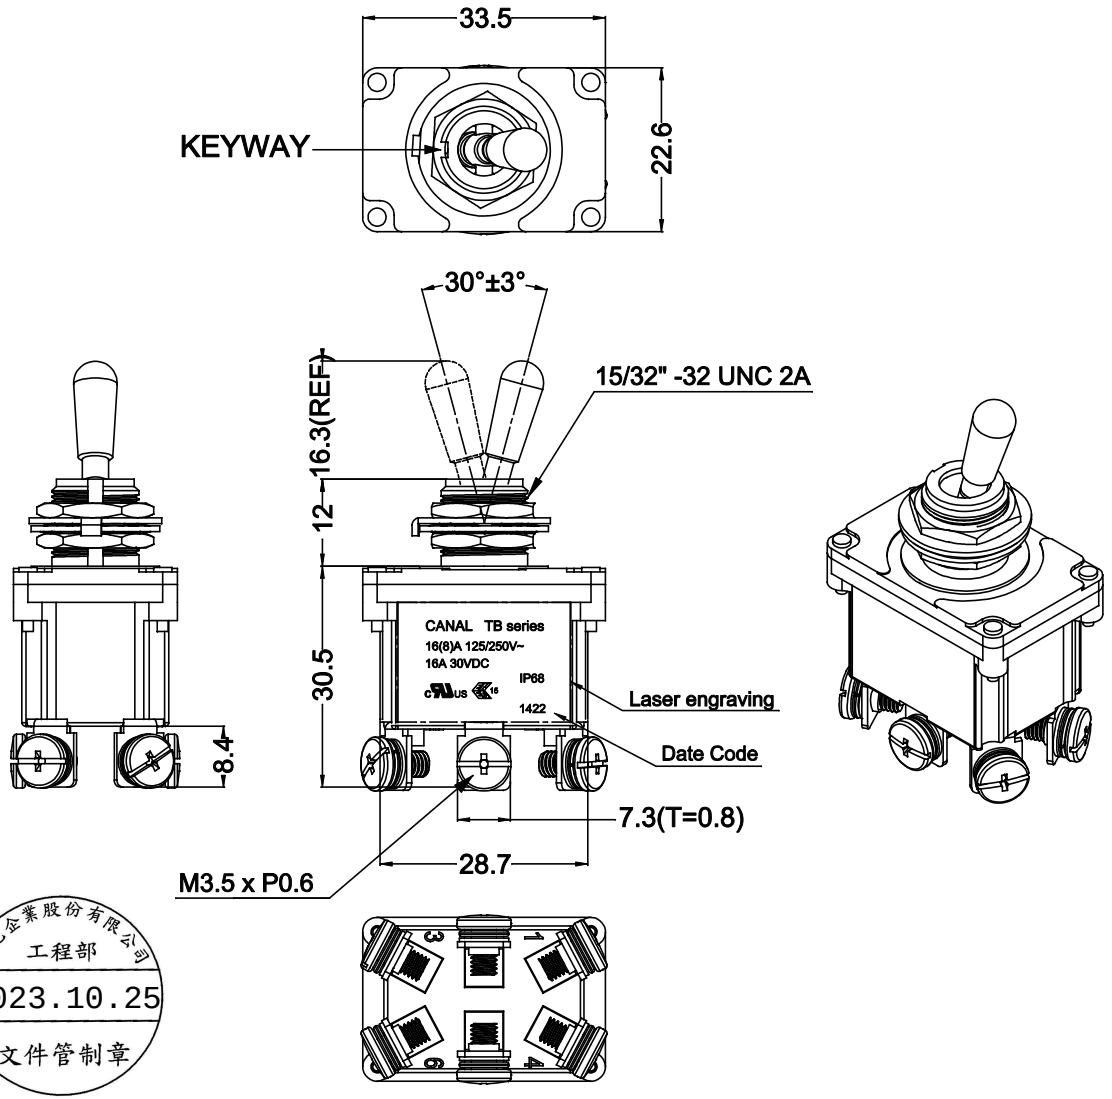

SPECIFICATION MODEL : TB SERIES

Rating: 16(8)A 125/250V~ T55
Electrical Life Life: 10,000 cycles (cURus/ENEC15)
Mechanical Life: 50,000 cycles
Contact resistance: 20mΩ Inital (MAX),
Insulation resistance: 500VDC - 100MΩ (MIN).
Dielectric Strength:
(1) 1500VAC For 1 minute (Terminal to Enclouse)
(2) 500VAC For 1 minute (Terminal to Terminal)
Degree of protction: IP68（Above the panel）



CIRCUIT: DPDT
(ON) - ON

SWITCH FUNCTION	
(ON)	ON
(1-2) (4-5)	2-3 5-6



MOUNTING HOLE



WITH KEYWAY

嘉尼企業股份有限公司 工程部 2023.10.25 文件管制章

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : ± .02 / 0.5 (mm).

REVISION	DESCRIPTION	REVISED BY	TOLERANCES X.X:			ANGLE ½°		UNIT	mm	PART NAME	SPEC DRAWING	DWG NO
4			DRAWN BY	范修銓	DESIGNED BY	范修銓	SCALE	1/1				WS9097A
3												
2			CHECKED BY	ERIC	APPROVED BY		DATE	2023.10.25		PART NO	TB4-AB48-1	
1 2023.10.25	首次出圖	范修銓										