

SPECIFICATION MODEL : TB SERIES

Rating: 20(8)A 125/250V~ T55

Electrical Life: 10,000 cycles (cURus/ENEC15)

Mechanical Life: 50,000 cycles

Contact resistance: 20mΩ Initial (MAX),



Insulation resistance: 500VDC - 100MΩ (MIN).

Dielectric Strength:


(1) 1500VAC For 1 minute (Terminal to Enclouse)

(2) 500VAC For 1 minute (Terminal to Terminal)


Degree of protection: IP68 (Above the panel)

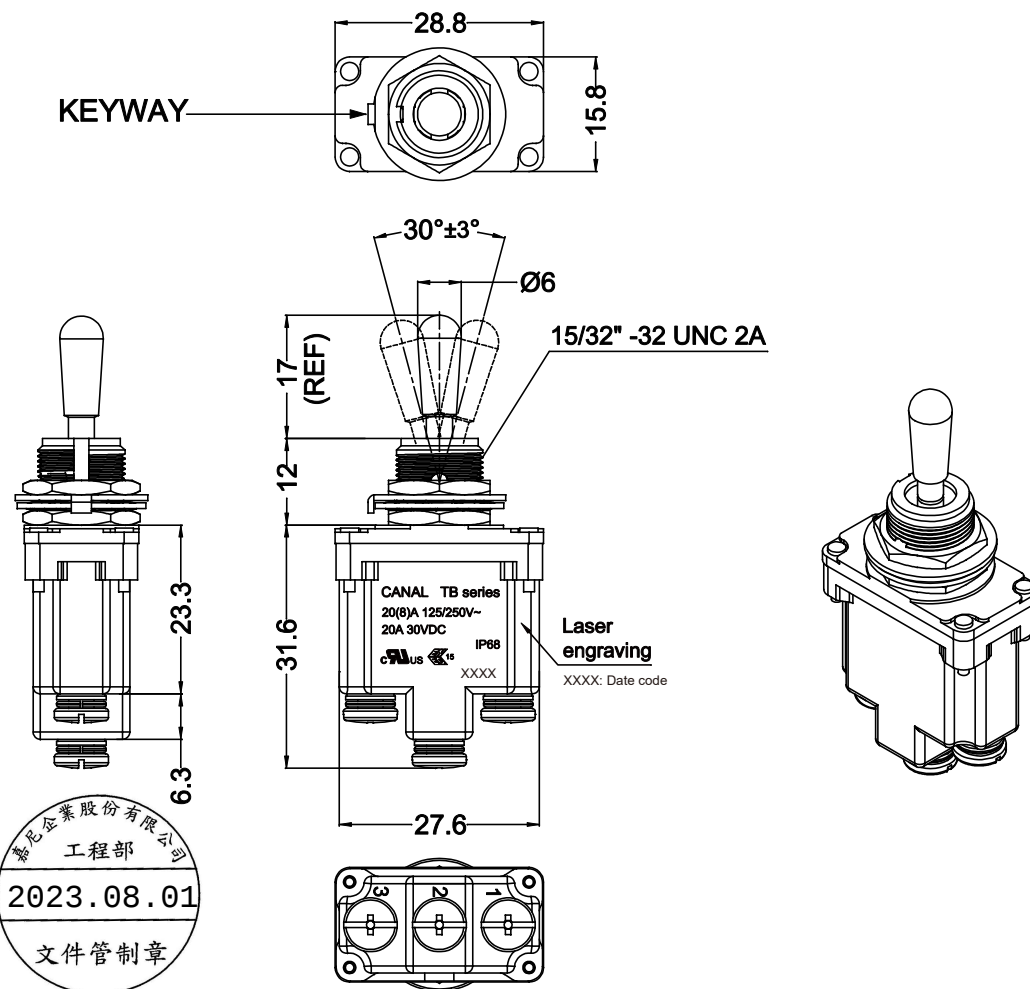

SWITCH FUNCTION		
		
(ON)	OFF	(ON)
(1-2)	OFF	(2-3)



MOUNTING HOLE



WITH KEYWAY

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : $\pm \frac{.02}{0.5}$ (mm).

[illegible]