

C2-3008 LED Work Light

9-33VDC | Wide Beam | 2700lm | 15W | IP68 / 69K




The C2-3008 is a front mount PAR 36 auxiliary LED work light designed to replace or enhance standard vehicle work lights.


It features an aluminium housing with a circular polycarbonate lens. Six 3W Osram LEDs provide a powerful and effective 1100 lumen illumination. Operating within a voltage range of 9-33VDC, it consumes 15W of power ensuring efficient and reliable flood lighting with low energy usage. The recess mount design with a clear lens is IP68/IP69K ingress protected and offers an excellent 10G shock resistance to withstand the harshest conditions and protection against dust, water, and chemicals. It can operate in temperatures from -30 to +85° C and is approved under ECE R10 and ISO 13766 to meet international standards for electromagnetic compatibility. This work light is ideal for use in specialist, agricultural, and construction vehicles. Overheat, reverse polarity and over voltage protected



Dimensions (mm)

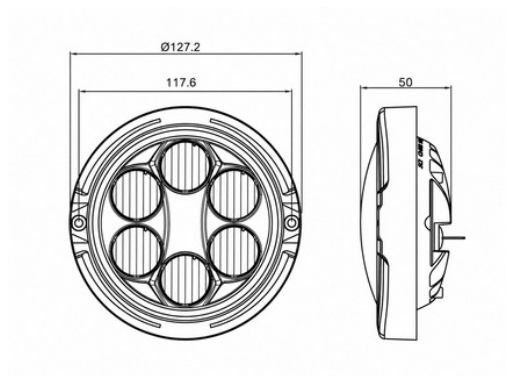

Beam Pattern 2.5m at 10°

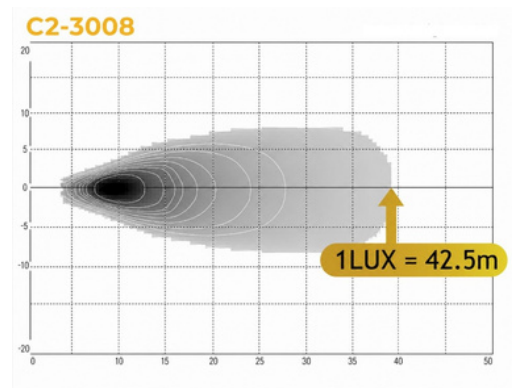

Specifications

Housing Shape	Round	Beam Pattern	Flood
Raw Lumen Output	2700lm	Effective Lumen Output	1100 lm
Colour Temperature	5700K	Voltage	9-33VDC
Nominal Current at	1.25A@12V ~ 0.61A@24V	Power Consumption	15W
IP Rating	IP68 / IP69K	Shock Resistance	10G
Operating Temp Range	-30°C...+65°C	Housing Material	Aluminium
Lens Material	Polycarbonate	Dimensions	127.2 x 50mm
Mounting Style	Recess mount	Termination	6.3mm Faston
EMC	ISO13766, ECE R10	Approvals	