

C2-304 LED Work Light


9-33VDC | Wide Beam | 3600lm | 18W | IP68 / 69K



The C2-304 is a slimline round LED work light designed for durability and efficiency. It features an aluminium housing and a polycarbonate lens, with eight 3W LEDs providing bright and uniform illumination with an effective 990lm output. Operating within a voltage range of 9-33VDC, it consumes 18W of power, ensuring reliable lighting with low energy usage. The light is designed to withstand harsh conditions, with an IP68/IP69K rating for protection against dust and water, and it offers excellent 10G shock resistance. Approved under ECE R10, ISO 13766, and CISPR 25 Class 5, it meets international standards for electromagnetic compatibility. This work light is available with either a flood or wide flood beam type and is ideal for use in specialist, agricultural and construction vehicles. A marine qualified version of this light is available. Overheat, reverse polarity and over voltage protected




Dimensions (mm)

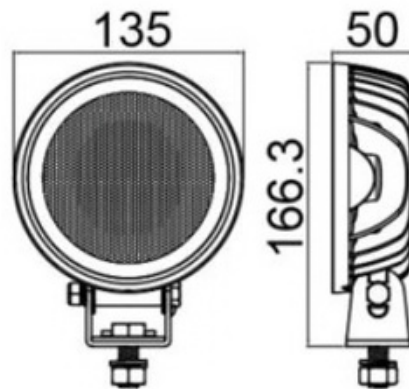


Beam Pattern 2.5m at 10°

C2-304A

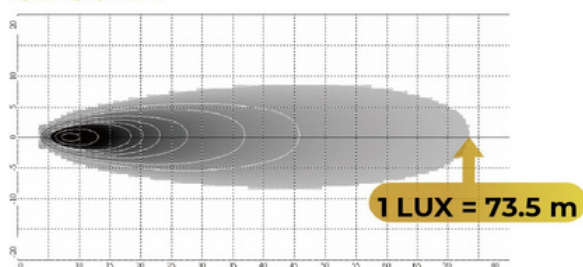

C2-304B

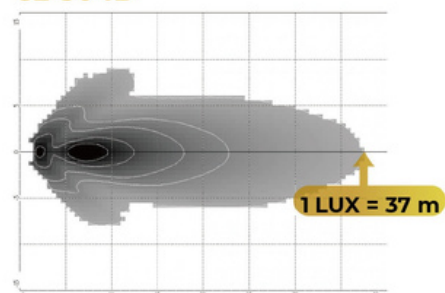

C2-304 LED Work Light

9-33VDC | Wide Beam | 3600lm | 18W | IP68 / 69K

Specifications

Housing Shape	Round	Beam Pattern	Flood / Wide Flood
Raw Lumen Output	3600lm	Effective Lumen Output	990lm
Colour Temperature	5700K	Voltage	9-33VDC
Nominal Current at	1.5A@12V ~ 0.85A@24V	Power Consumption	18W
IP Rating	IP68 / IP69K	Shock Resistance	10G
Operating Temp Range	-30°C...+65°C	Housing Material	Aluminium
Lens Material	Polycarbonate	Dimensions	135 x 166.3 x 50mm
Mounting Style	Vertical single bolt bracket	Termination	150mm wire & DT04-2P connector
EMC	ECE R10, ISO13766, CISPR25 class5	Approvals	-