C2-369R LED Reversing Lamp

9-33VDC | Wide Beam | 1600lm | 6W | IP66



Designed for:


Off road & Specialist Vehicle

Agriculture & Construction


The C2-369R is a mini oval low power consumption LED reversing light designed for durability and efficiency. With two fully approved LEDs providing an effective, bright and uniform illumination of 450lm. Operating within a voltage range of 9-64VDC, it consumes 6W of power, ensuring reliable lighting with low energy usage. The light is designed to withstand harsh conditions and can withstand temperatures from -30 to +85°C. It has an IP66 rating for protection against dust and water, and offers excellent 7G shock resistance. Approved under ECE R23 R10, and EN 50498, it meets international standards for electromagnetic compatibility. The LEDs emit a cool white flood light covering an area of 18m behind a vehicle, improving reversing visibility in low-light conditions. This reversing light is ideal for use in specialist, off road and commercial vehicles.
Overheat, reverse polarity and over voltage protected

9-64VDC | **Wide Beam** | **1600lm** | **6W** | **IP66**

Dimensions (mm)

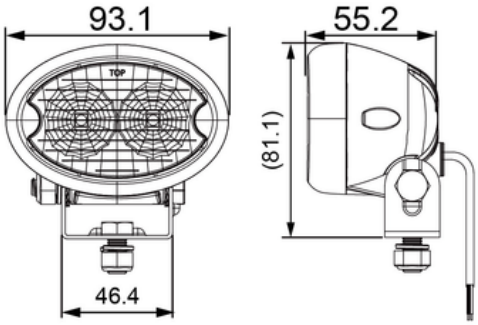

Beam Pattern 2.5m at 10°

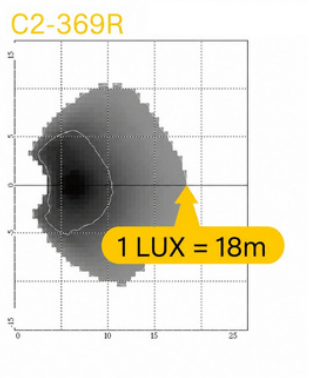

Specifications

Housing Shape	Oval	Beam Pattern	Flood / Wide Flood
Raw Lumen Output	900lm	Effective Lumen Output	320lm
Colour Temperature	5700K	Voltage	9-64VDC
Nominal Current at	0.5A@12V ~ 0.27A@24V	Power Consumption	6W
IP Rating	IP66	Shock Resistance	7G
Operating Temp Range	-30°C...+65°C	Housing Material	Non metal Thermally conductive plastic
Lens Material	Polycarbonate	Dimensions	93.1 x 81.1 x 55.2mm
Mounting Style	Single bolt bracket	Termination	300mm wire
EMC	EN50498, ECE R10, EN60495, CISPR25 class3, ISO13766	Approvals	ECE R23

Lucid Electronics Limited is an appointed SCI sales agent
Unit 425 Bedford Heights, Manton Lane, Bedford, MK41 7PH | Company Number 10385887 | VAT 262 6152 16
UK Office: +44 (0)1234 380226 | France Office: +33 (0) 7 67 38 35 67 | Email info@lucidelectronics.com | web: www.lucidelectronics.com