


C2-373C LED Work Light


9-33VDC | Wide Beam | 2100lm | 12W | IP67




The C2-373C is a mini round LED work light designed for durability and efficiency. It features an aluminium housing and a polycarbonate lens, with three 5W LEDs providing an effective 900lm bright and uniform illumination. Operating within a voltage range of 9-33VDC, it consumes 12W of power, ensuring reliable lighting with low energy usage and is completely adjustable for maximum visibility. The light is designed to withstand harsh conditions and has an IP67 rating for protection against dust and water, and offers excellent 10G shock resistance. Approved under EN 50498, it meets international standards for electromagnetic compatibility. The LEDs emit a cool white light, improving visibility in low-light conditions. This work light is ideal for use in specialist, agricultural and construction vehicles.

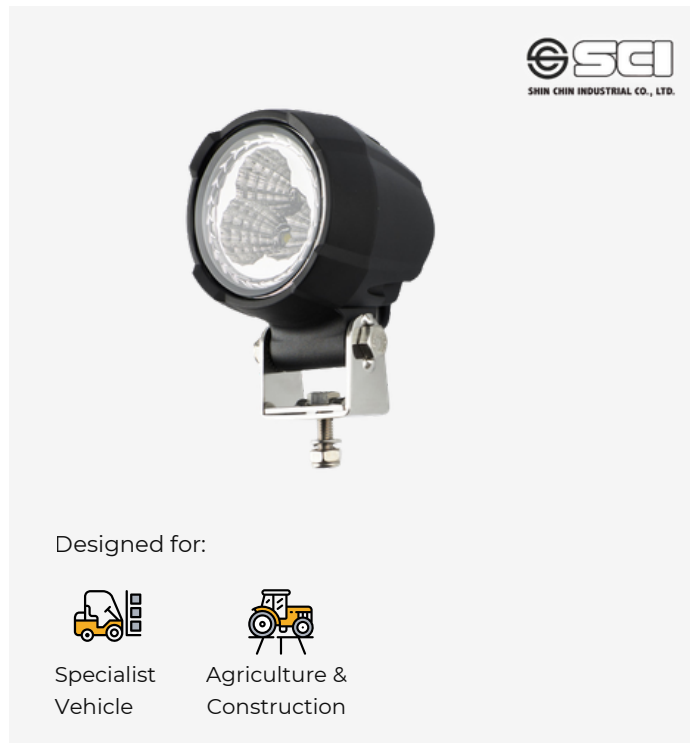

Dimensions (mm)

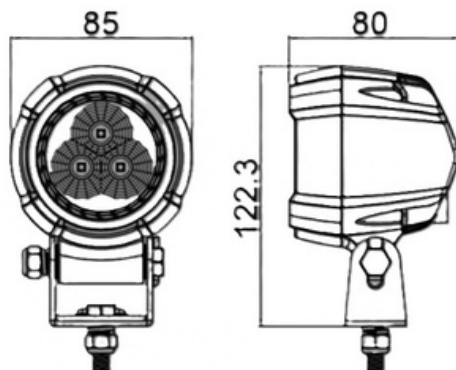

Beam Pattern 2.5m at 10°

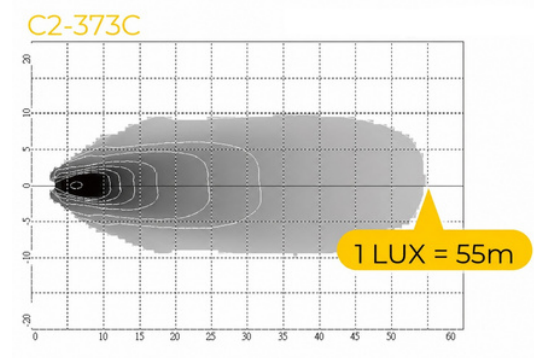

Specifications

Housing Shape	Round	Beam Pattern	Wide Flood
Raw Lumen Output	2100lm	Effective Lumen Output	900lm
Colour Temperature	5700K	Voltage	9-33VDC
Nominal Current at	0.98A@12V ~ 0.5A@24V	Power Consumption	12W
IP Rating	IP67	Shock Resistance	10G
Operating Temp Range	-30°C...+65°C	Housing Material	Aluminium
Lens Material	Polycarbonate	Dimensions	85 x 122.3 x 80mm
Mounting Style	Vertical single bolt bracket	Termination	300mm wire
EMC	ECE R10, EN50498	Approvals	ECE R23