

C2-388A LED Work Light

10-33VDC | Wide Beam | 5600lm | 35W | IP68 / 69K



The C2-388A is a large oval LED work light designed for durability and efficiency. It features an aluminium housing and a polycarbonate lens, with eight high-power LEDs providing an effective output of 3300lm offering bright and uniform illumination. Operating within a voltage range of 10-33VDC, it consumes 35W of power, ensuring reliable lighting with low energy usage. The light is designed with a 10G shock resistance which along with an IP68/IP69K ingress protection against dust, water, and chemicals makes it very suitable for the harshest of environments. Approved under ECE R10, ISO 13766, and CISPR 25 Class 3, it meets international standards for electromagnetic compatibility. These upright mounted work lights come with either a clear lens flood or a diffused lens wide flood beam as standard, making them ideal for use on specialist, agricultural, and construction vehicles. Overheat, reverse polarity and over voltage protected



10-33VDC



Wide Beam



5600lm




35W




IP68 / 69K

Dimensions (mm)

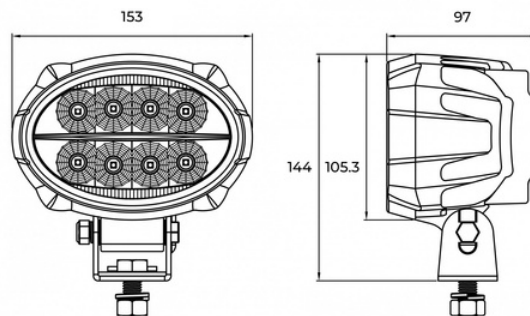


Beam Pattern 2.5m at 10°

C2-0388A1

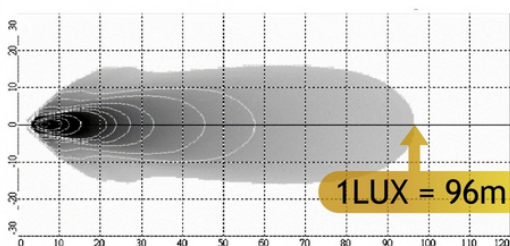

C2-0388A2

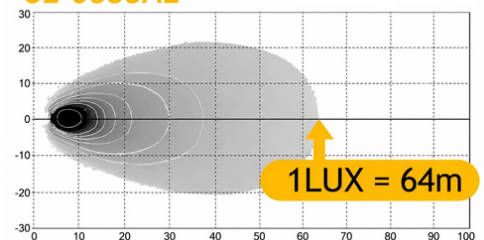

C2-388A LED Work Light

10-33VDC | Wide Beam | 5600lm | 35W | IP68 / 69K

Specifications

Housing Shape	Oval	Beam Pattern	Flood/ Wide Flood
Raw Lumen Output	5600lm	Effective Lumen Output	3300lm
Colour Temperature	5700K	Voltage	10-33VDC
Nominal Current at	2.92A@12V ~ 1.46A@24V	Power Consumption	35W
IP Rating	IP68 / IP69K	Shock Resistance	10G
Operating Temp Range	-30°C...+65°C	Housing Material	Aluminium
Lens Material	Polycarbonate	Dimensions	153 x 97 x 144mm
Mounting Style	Vertical single bolt bracket	Termination	Deutsch DT04-2P connector or 300mm wire
EMC	ECE R10, ISO13766, CISPR25 class3	Approvals	-