

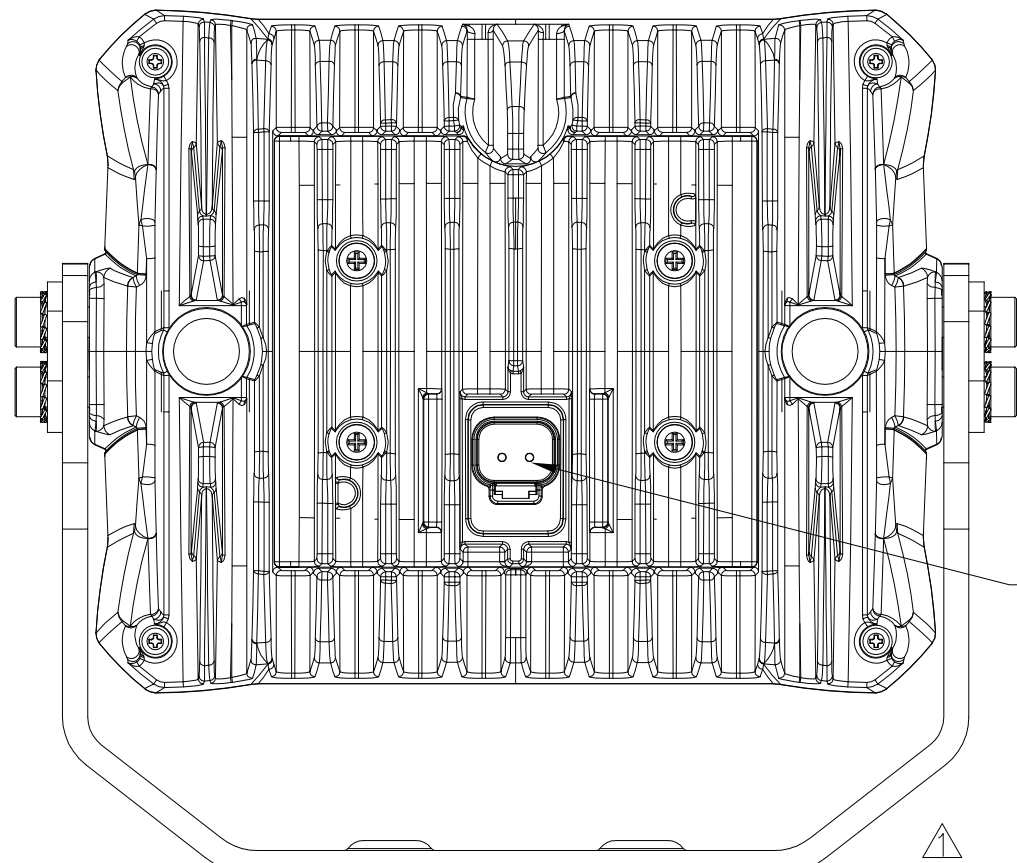
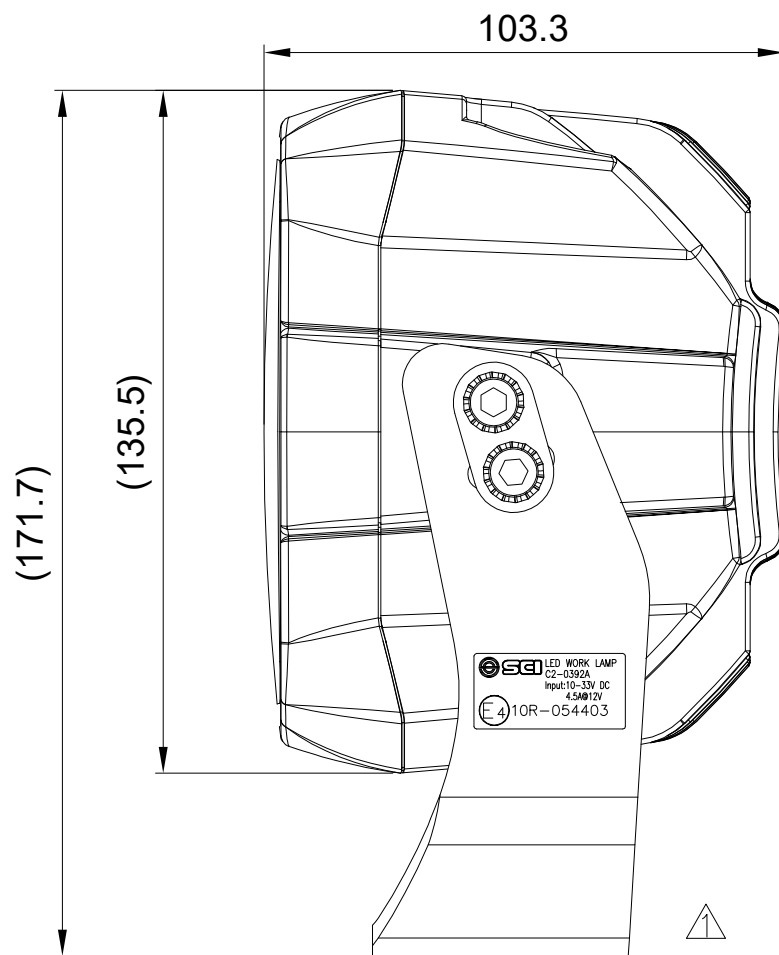


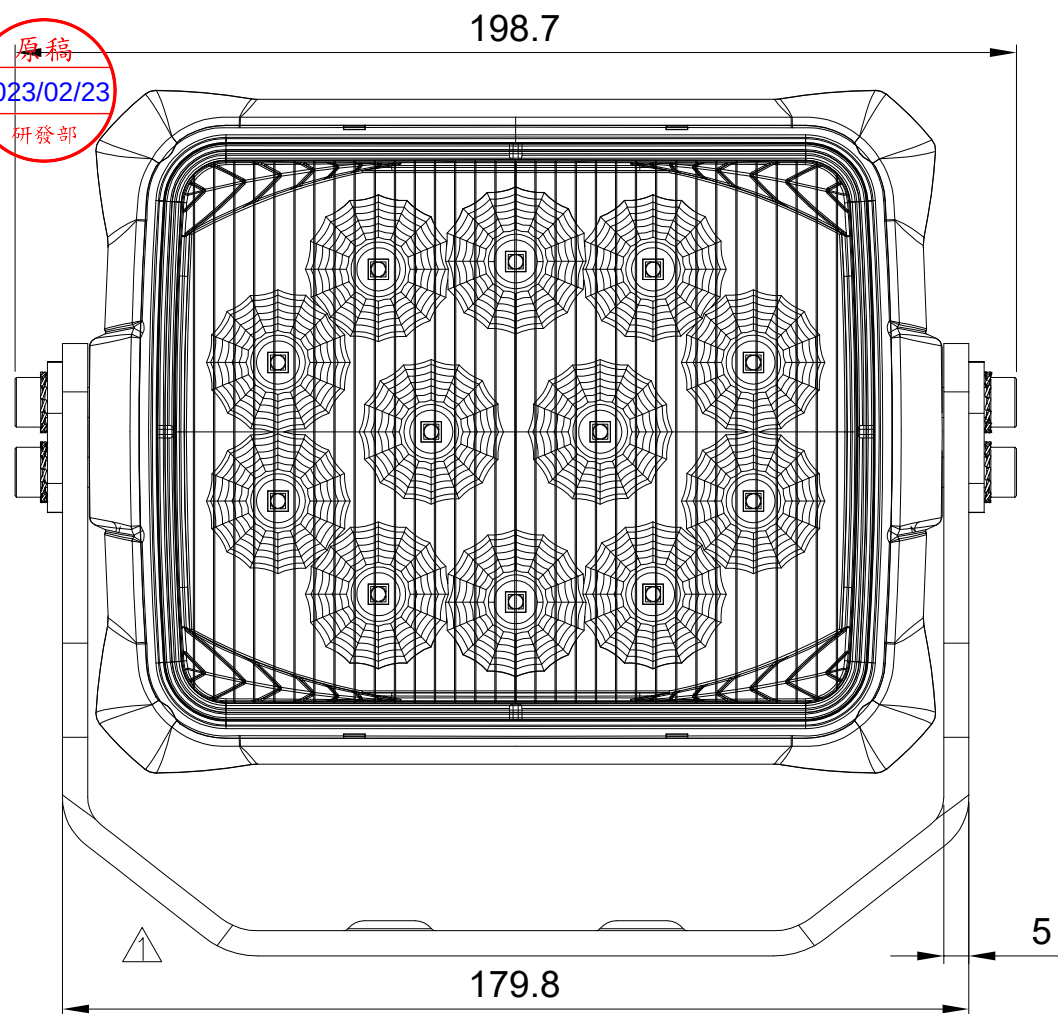

CONNECTOR: DT04-2P

Nominal/Input Voltage DC	12/24 10~33V
Nominal Current at	4.5Amps@12V 2.3Amps@24V
Power Consumption	50W
LED	5W(OSRAM)
IP Rating	IP68
Shock	10G
Body	Aluminium
LENS	PC
CONNECTOR	DT04-2P
EMC	ECE R10 / ISO13766
Operating Temperatures	-30~+65°C
Raw Lumen Output	8600
Effective Lumen Output	4400
Color Temperature	5700K
Beam Pattern(s)	Wide Flood

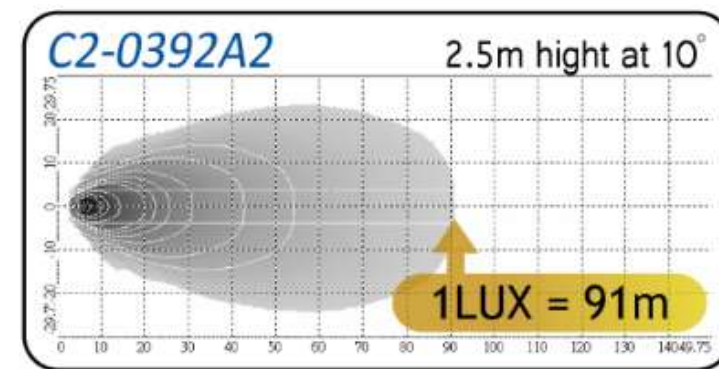

LABEL



A3

02/10/'23	沈忠男	Effective Lumen Output修改為裸燈配光數值;原 2600更改為 4400	
04/06/'20	沈忠男	舊版固定架 (C2-0392-8)調整角度太小, 故更換新固定架 (C2-0392-8B)調整角度較大	
Date	Name	Description	NO

Drawn	Checked	Approved	SCI BOM No.	1263723	Model Name	LED Work Lamp
歐家綺	沈忠男	張惠伶	Customer No.		Model No.	C2-0392A2Y-D10-33-5W5700P12-R10
03/26/'18	2023/02/13	2023/02/13	Unit	mm	Shin Chin Industrial Co., Ltd.	Rev. 2