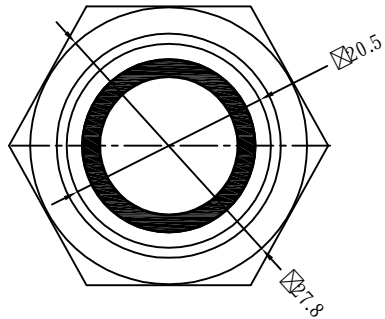


SPECIFICATION MODEL : "PS5" SERIES

RATING: 16(4)A 125/250V~(cURus )

16(4)A 250V~ T125/55(ENEC15/CQC)




WITHSTAND VOLTAGE: 1500VAC 1 MINUTE

CONTACT RESISTANCE: 20m Ω INITIAL (MAX),


PROTECTION TYPE: IP68(PANEL WATERPROOF)

INSULATION RESISTANCE: 500VDC - 100MΩ (MIN).

ILLUMINATION: 200-250VAC

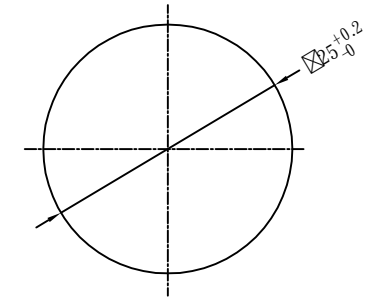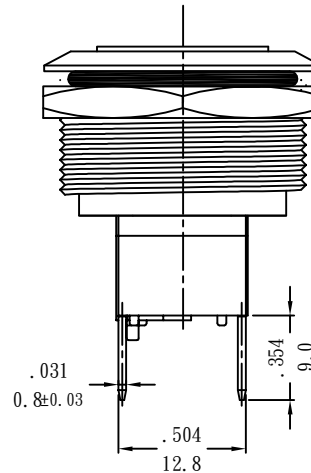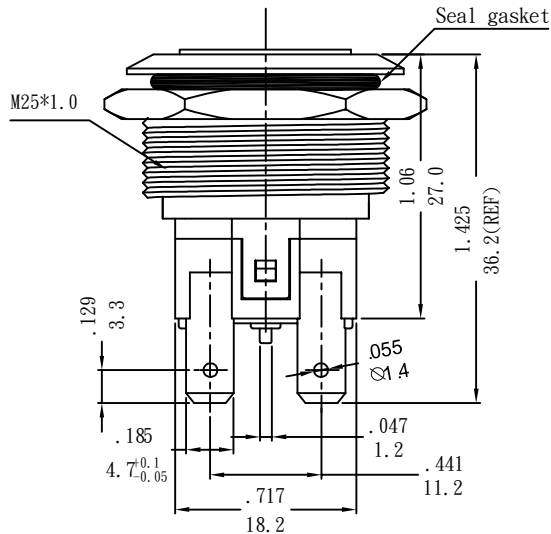

Panel Cutout Ø25 mm  
(Panel thickness : 7 mm MAX)



NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED: ± .012/0.3 (in/mm)

| REVISION | DESCRIPTION | REVISED BY | TOLERANCES |     | ANGLE 1/2°  |    | UNIT  | mm         | PART NAME | PS-5 SPEC DRAWING  | DWG NO  |
|----------|-------------|------------|------------|-----|-------------|----|-------|------------|-----------|--------------------|---------|
| △        |             |            | DRAWN BY   | 達志各 | DESIGNED BY | 蔡劍 | SCALE | 5/4        |           |                    |         |
| △        |             |            | CHECKED BY |     | APPROVED BY |    | DATE  | 2026.04.17 | PART NO   | PS5-2104G-BUA-0RAC | S10796A |
| △        | 2026.04.17  | 首次出圖       |            | 達志各 |             |    |       |            |           |                    |         |