


SPECIFICATION MODEL: VK SERIES

CERTIFICATES	C14 Inlet	FUSE HOLDER	SWITCH
STANDARD	UL / IEC / EN 60320-1 GB 17465.1 & 17465.6	IEC / EN 60127-1 & -6 GB 17465.1 & 17465.6	UL / IEC / EN 61058-1 GB 15092.1
RATING	10A 250VAC	10A 250VAC / 2.5W	12(4)A 125/250V~ 10(4)A 250V ~ T125/55
INSULATION RESISTANCE	100MΩ , DC 500V		100MΩ , DC 500V
DIELECTRIC STRENGTH	2000VAC / 1 MINUTE		1500VAC / 1 MINUTE

PART NO	VK-301-NB-107	MR-211C5W-GBRB-11NC (AC 220V)
---------	---------------	-------------------------------

NOTE: THIS PART NUMBER DOES NOT INCLUDE A FUSE FOR SHIPPING.

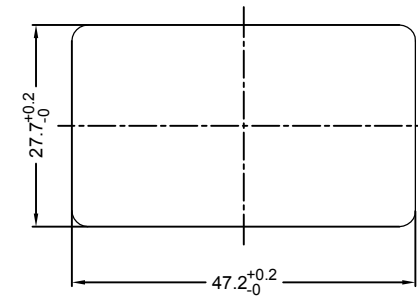

PANEL CUT-OUT



MATERIAL:
BODY / FUSE HOLDER: PA66 UL94 V-0
TERMINAL: NICKEL PLATED BRASS

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED : ± 0.3 (mm)

REVISION	DESCRIPTION	REVISED BY	TOLERANCES		ANGLE $\frac{1}{2}^\circ$	UNIT	mm	PART NAME	DWG NO
△			DRAWN BY	楊偉韶	DESIGNED BY	蔡劍	SCALE	1:1	VK SPEC DRAWING
△			CHECKED BY		APPROVED BY		DATE	2026.05.18	
△	首次出圖	楊偉韶					PART NO	VK-301-NB-107	S10857A