嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.

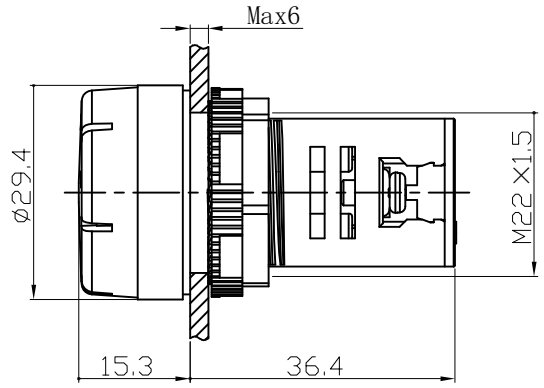





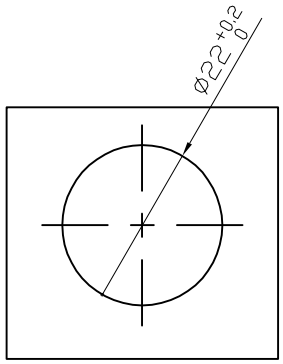

嘉尼工程
2026.06.12
文件管制章

1.Operating Conditions

1) Altitude: ≤ 2000 m
2) Operating Temperature: -25° C to +70° C (No freezing)
3) Storage Temperature: -40° C to +80° C
4) Ambient Humidity: 45%-90% RH

2.Performance Parameters

1) Rated Insulation Voltage (U,): 250V
2) Power-Frequency Withstand Voltage: 2000V 50Hz/ 1 min
3) Rated Current: ≤20mA
4) LED Lifespan: 40, 000 h (Reference value)
5) LED Colors Available: R (Red)
6) LED Voltages Available: 24V
7) Buzzer Sound Level: ≥80dB(0.1m)
8) Wiring Method: Screw terminals

3.Materials

Housing	Color Cap		
Nylon	PC		

NOTE:TOLERANCES UNLESS OTHERWISE SPECIFI ED: ± 0.5mm

REVISION	DESCRIPTION	REVISED BY	TOLERANCES				ANGLE ½° ◎	UNIT	mm	PART NAME	AD SPEC DRAWING	DWG NO
4			DRAWN BY	蔡宁燕	DESIGNED BY	蔡剑	SCALE	2/1				WS2196A
3												
2			CHECKED BY		APPROVED BY		DATE	2026.06.12		PART NO	AD60-22DS/F-R/24V	
1 2026.06.12	首次出圖	蔡宁燕										