

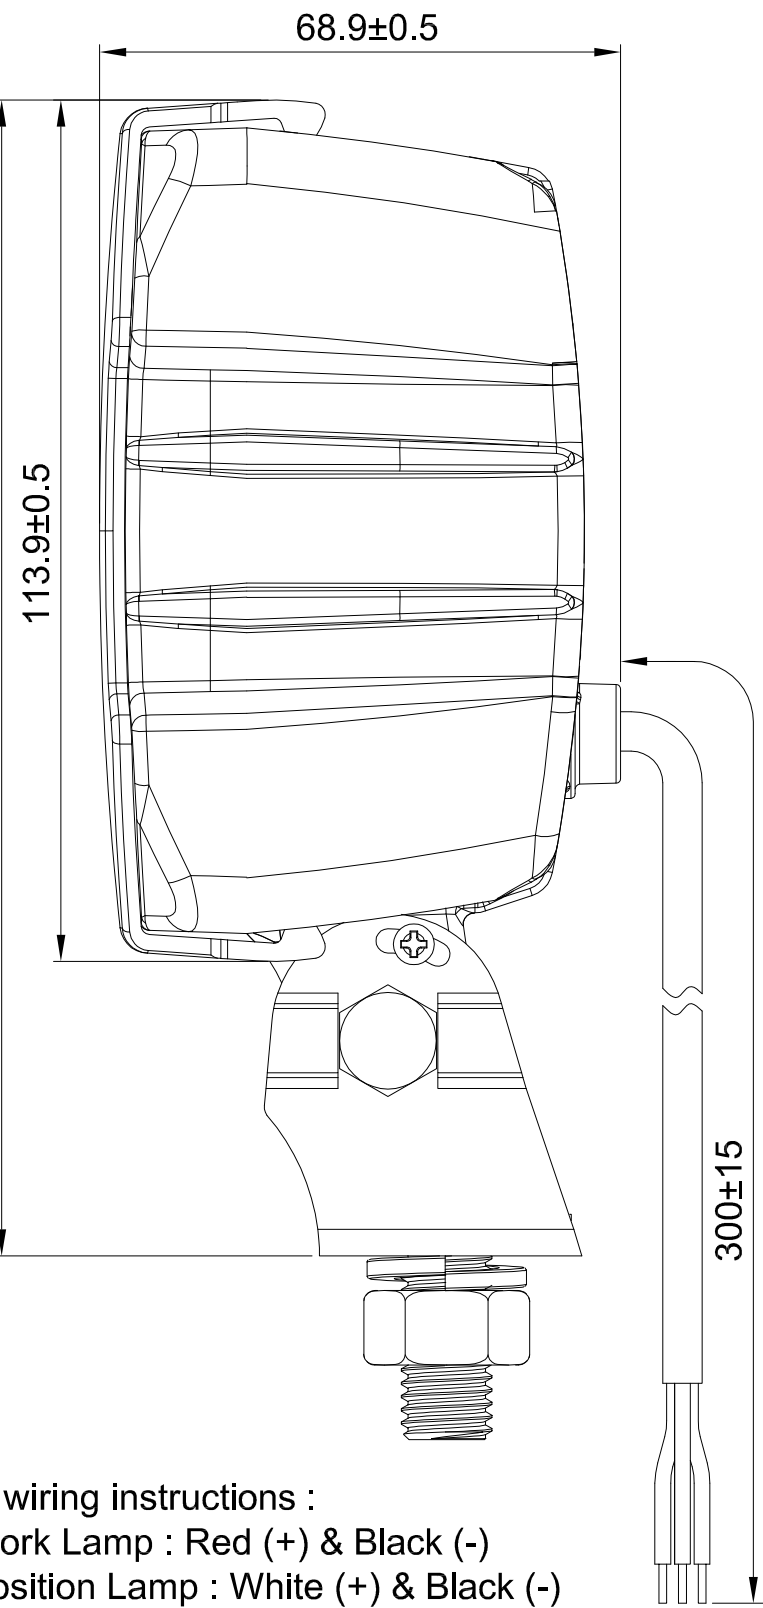


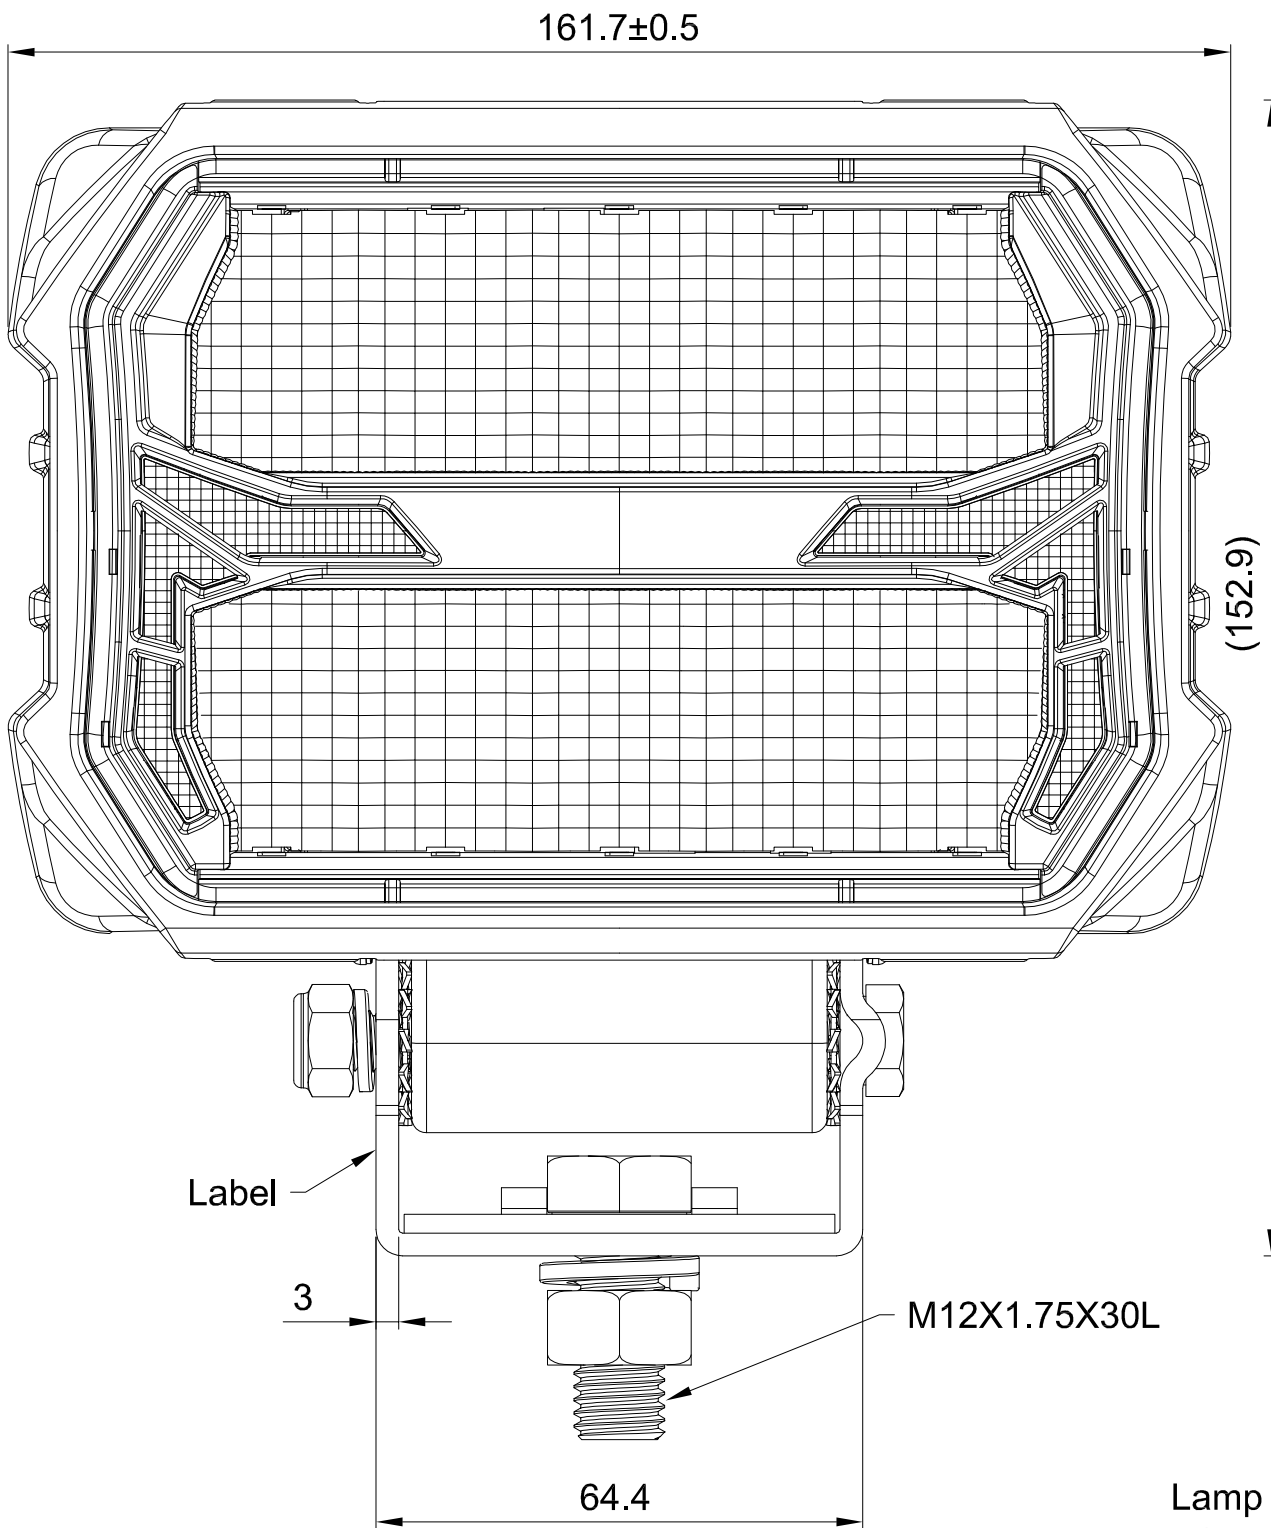


- Lamp wiring instructions :
- 1. Work Lamp : Red (+) & Black (-)
 - 2. Position Lamp : White (+) & Black (-)

Nominal/Input Voltage DC	10~33 DC
Nominal Current at	Work Lamp: 4.6A@12V 2.3A@24V Front Position Lamp: 0.07A@12V 0.04A@24V
Power Consumption	55W / 1W
Raw Lumen Output	10450 Lm
Effective Lumen Output	2500 Lm
LENS	PC
Body	Aluminium
IP Rating	IP68 / 69
Vibration	10G
EMC	ECE R10 / ISO 13766 CISPR25 Class 3
Operating Temperatures	-30°C~+65°C
Approvals	ECE R148
Beam Pattern(s)	Flood Beam

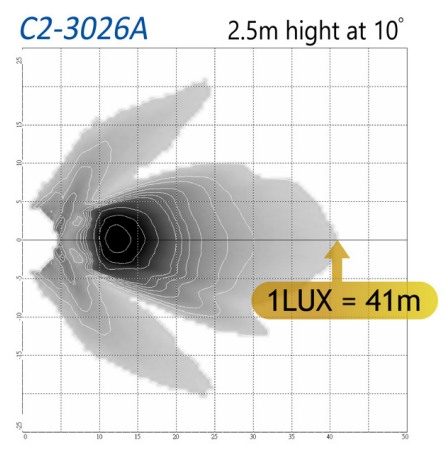

LABEL

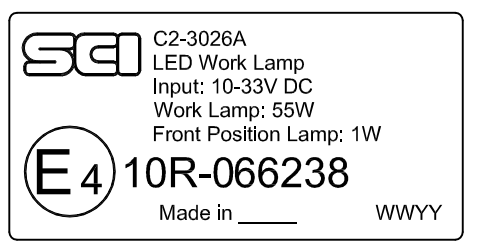

A3

Drawn	Checked	Approved	SCI BOM No.	1265036	Model Name	LED WORK LAMP
歐家綺/吳俊緯			Customer No.		Model No.	C2-3026A-1033-HPW-FLB
05/21/26			Unit	mm	Shin Chin Industrial Co., Ltd.	Rev.
Date	Name	Description	NO			X0